VanGaa International Lighting Co., Limited
Guangzhou VanGaa Lighting Equipment Co., Limited
Annt: Justin Yin E-mail: justinyin@ymail.com justin@vangaalight.com
Homepage: http://www.vangaa.com Showroom: http://vangaalighting.en.made-in-china.com
Tel: 0086 (0)20 8643 2439 Fax: 0086 (0)20 8643 2439 Mobile: 0086 158 7651 6138

Catalogue 2012~2013


INDEX

(Please chose the SERIES what you are interested and press the link)

High Power LED Light Series	01	Traditional Stage Light Series	60
LED City Color Light Series	13	Search Light Series	62
LED Moving Head Light Series	26	Strobe Light Series	69
LED Effect Light Series	38	DMX Controller Series	72
Moving Head Light Series	48		

HIGH POWER LED LIGHT SERIES

54pcs High Power Waterproof Par Light(RGB, IP67)

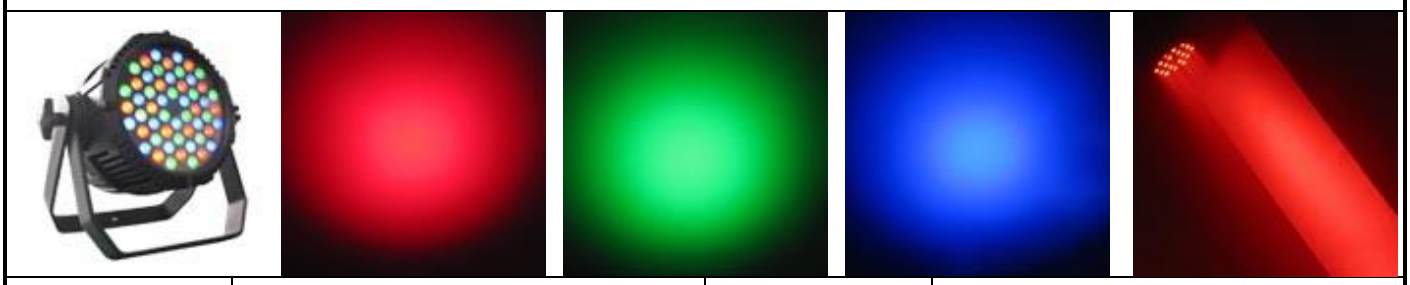

Origin	Guangzhou, P. R. China	**Trademark**	**VanGaa**
Mode No.	VG-LP543A	**Ref. code**	
TRADE TERMS			
Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	1 piece
Unit price	**US$:**		

DESCRIPTION

Features

Control panel 4 digital LCD display show, with sign information for the power and signal;

High efficiency constant current drive, 4096 level gray adjustment, no flash, mixed variety colors can reach to as many as 16 million;

5 levels color temperature adjustment function built-in, with a variety of strobe and auto-run effect, master/slave control mode acceptable;

8 DMX channels(STAG mode) or 3 DMX channels(HSV mode) optional;

Uses high quality genuine transparency acrylic lens as the second optical;

With high efficiency thermal automatic protection

ID address code automatic input function.

Specifications

Input power: AC110~240V, 50/60Hz (Uses switching power supply)

Power consumption: 165W

Light sources: 54pcs 3W supper brightness LED Lamps, (R:18; G:18; B:18)

LED Lifespan: 50,000hours

Beam angle: 25degree(8degree/15degree/45degree optional)

Effect: 0~100% dimmer, 0~20Hzstrobe


DMX channels: 8CH(STAG mode) or 3CH(HSV mode)

Agreement: DMX-512

Control mode: DMX-512 control mode, auto-run and

function; Super brightness and extreme projection distance; Innovative gray adjustment technology to make the dimmer and color change more smoothly;		master/slave control mode IP rating: IP67 Working temperature: -25centigrade ~+35centigrade Housing material: die-casting aluminum	
PACKAGE			
Package	carton	**Pcs/ctn**	1pc/ctn
Ctn size	275*240*280mm	**N.W/G.W**	7kg/8kg


54pcs LEDs High Power Waterproof PAR Light (RGBW, IP67)

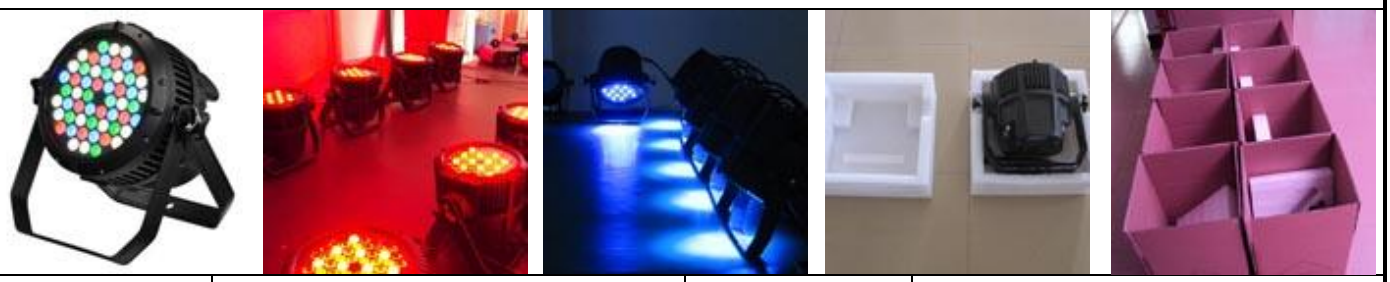

Origin	Guangzhou, P. R. China	**Trademark**	**VanGaa**
Mode No.	VG-LP543B	**Ref. code**	
TRADE TERMS			
Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	1 piece
Unit price	54x3W US$:		
DESCRIPTION			
Features Control panel 4 digital LCD display show, with sign information for the power and signal; High efficiency constant current drive, 4096 level gray adjustment, no flash, mixed variety colors can reach to as many as 16 million; 5 levels color temperature adjustment function built-in, with a variety of strobe and auto-run effect, master/slave control mode acceptable; 8 DMX channels(STAG mode) or 3 DMX channels(HSV mode) optional; Uses high quality genuine transparency acrylic lens as the second optical; With high efficiency thermal automatic protection function; Super brightness and extreme projection distance; Innovative gray adjustment technology to make the dimmer and color change more smoothly;		ID address code automatic input function. **Specifications** Input power: AC110~240V, 50/60Hz (Uses switching power supply) Power consumption: 165W Light sources: 54pcs 3W supper brightness LED Lamps, (R:12; G:12; B:12; W:18) DMX channels: 8CH(STAGE mode) or 3CH(HSV mode) LED Lifespan: 50,000hours Beam angle: 25degree(8degree/15degree/45degree optional) Effect: 0~100% dimmer, 0~20Hzstrobe Agreement: DMX-512 Control mode: DMX-512 control mode, auto-run and master/slave control mode IP rating: IP67 Working temperature: -25centigrade ~+35centigrade Housing material: die-casting aluminum	
PACKAGE			
Package	carton	**Pcs/ctn**	1pc/ctn
Ctn size	275*240*280mm	**N.W/G.W**	7kg/8kg

54pcs LEDs Indoor LED Par Light (RGB)







Origin	Guangzhou, P. R. China	**Trademark**	**VanGaa**
Mode No.	VG-LPI543A	**Ref. code**	
TRADE TERMS			
Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	1piece
Unit price	54pcsx3W US$:		

DESCRIPTION

Combining the features of the LED energy-saving and environment-protective, using high efficiency constant current & new heat dissipation technology, 256 Grey Scale adjusted and create revise technology to make the dimmer to be more smoothly. This par light is applying for the big show, stage, theatre, and other indoor places.

Features

Advantages of LED technology extremely long life, energy-saving and environment-protective;
Low power consumption, minimal heat emission, maintenance free with brilliant light radiation;
Equipped with 54x 3W LEDs: R:18, G:18, B:18;
High power LEDs made by EDISON;
100,000 hours LED life;
Continuous RGB color changing;
DMX-controlled operation or stand alone operation with master/slave function;
Have three kinds of strobe effect(random strobe, pulse-effect in sequences, strobe effect);
8 built-in programs can be called up via DMX controller and custom-programs;
Rainbow-effect with adjustable speed;
DMX-control via every standard DMX controller.

Specifications

Input voltage: AC90~264V, 50/60Hz
Power consumption: 165W
Light source: 54pcs 3W EDISON LED Lamps, (R:18, G:18, B:18)
Beam angle: 8 °15 °25 °45 °optional
Housing material: aluminium alloy
Working temperature: -25℃~+35℃
Effect: strobe, color change, color fade
Control mode: DMX mode, Auto mode, Master/slave mode
DMX Channel: 7CH
IP rating: IP20

PACKAGE

Package	carton	**Pcs/ctn**	1pc/ctn
Ctn size	260*260*380mm	**N.W/G.W**	4.5kg/5.5kg

54pcs LEDs High Power Indoor PAR Light (RGBW)






Origin	Guangzhou, P. R. China	**Trademark**	**VanGaa**
Mode No.	VG-LPI543B	**Ref. code**	
TRADE TERMS			
Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	1piece
Unit price	54pcsx3W US$:		

DESCRIPTION

Combining the features of the LED energy-saving and environment-protective, using high efficiency constant current & new heat dissipation technology, 256 Grey Scale adjusted and create revise technology to make the dimmer to be more smoothly. This par light is applying for the big show, stage, theatre, and other indoor places.

Features

Advantages of LED technology extremely long life, energy-saving and environment-protective;
Low power consumption, minimal heat emission, maintenance free with brilliant light radiation;
Equipped with 54x 3W LEDs: R:12, G:18, B:18; W:6;
High power LEDs made by EDISON;
100,000 hours LED life;
Continuous RGB color changing;
DMX-controlled operation or stand alone operation with master/slave function;
Have three kinds of strobe effect(random strobe, pulse-effect in sequences, strobe effect);
8 built-in programs can be called up via DMX controller and custom-programs;
Rainbow-effect with adjustable speed;
DMX-control via every standard DMX controller.

Specifications

Input voltage: AC90~264V, 50/60Hz
Power consumption: 165W
Light source: 54pcs 3W EDISON LED Lamps, (R:12, G:18, B:18, W:6)
Beam angle: 25degree(8degree/15degree/45degree are optional)
Housing material: aluminium alloy
Working temperature: -25℃~+35℃
Effect: strobe, color change, color fade
Control mode: DMX mode, Auto mode, Master/slave mode
DMX Channel: 8CH

PACKAGE

Package	carton	**Pcs/ctn**	1pc/ctn
Ctn size	260*260*380mm	**N.W/G.W**	4.5kg/5.5kg

48pcs High Power LED Par Light








Origin	Guangzhou, P. R. China	**Trademark**	**VanGaa**

Mode No.	VG-LPI483A	**Ref. code**	
TRADE TERMS			
Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	1piece
Unit price	48x3W US$:		

DESCRIPTION

This high-power LED PAR light adopts aluminum shell made with beautiful shape, high efficiency and energy saving, durability, it is suitable for indoor use. This product strictly according to CE standard design and production, complete with international standard DMX512 agreement, both single machine control, also can be controlled by connected with, suitable for large art performance, theatres, studio, discos and other places of use.

Features

RGB prefect color mixture, built-in programs, auto-run mode, international standard DMX-512 control;

DMX-512 control mode, master-slave control mode, auto-run and built-in programs run mode four different operate mode;

International standard DMX-512 control signal, compatible with different products from different manufactures and different controller, intelligent automatic location ID, address can be automatic set;

0~255% dimmer, fade-in and fade-out time minimum above 100 milliseconds;

Synchronous or random electronic strobe speed variable, with fade-in and fade-out pulse strobe effects;

Heat conduction cycle flow cooling system heat dissipation;

Light body takes four digital LCD panels adjust control;

Die-casting aluminum alloy enclosure, installation location can be arbitrary adjustment.

Specifications

Input power: AC90~240V, 50/60Hz(Using power switching supply)

Power consumption: 150W

Light sources: 48pcs 3W EDISON LEDs, (R:16; G:16; B:16),

Beam angle: 25degree(8degree/15degree/45degree optional)

Lifespan: 100,000hours

Control signal: DMX-512

DMX channels: 8CH


Control mode: auto-run, sound active, mater-slave control mode, DMX-512 control mode

PACKAGE

Package	carton	**Pcs/ctn**	1pc/ctn
Ctn size	300*215*330mm	**N.W/G.W**	4.5kg/5kg

48pcs 3-in-1 LED Outdoor Par Light (IP67)




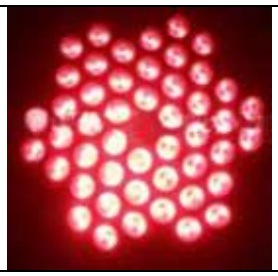


Origin	Guangzhou, P. R. China	**Trademark**	**VanGaa**
Mode No.	VG-LP483C	**Ref. code**	
TRADE TERMS			
Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	1piece
Unit price	US$:		

DESCRIPTION	
Features Control panel 4 digital LCD display show, with sign information for the power and signal; High efficiency constant current drive, 4096 level gray adjustment, no flash, mixed variety colors can reach to as many as 16 million; 5 levels color temperature adjustment function built-in, with a variety of strobe and auto-run effect, master/slave control mode acceptable; 7 DMX channels(STAG mode) or 3 DMX channels(HSV mode) optional; Uses high quality genuine transparency acrylic lens as the second optical; With high efficiency thermal automatic protection function; Super brightness and extreme projection distance; Innovative gray adjustment technology to make the dimmer and color change more smoothly; ID address code automatic input function.	**Specifications** Input power: AC110~240V, 50/60Hz (Uses switching power supply) Power consumption: 165W Light sources: 48pcs 3-in-1 3W supper brightness LED Lamps DMX channels: 7CH(STAGE mode) and 3CH(HSV mode) LED Lifespan: 50,000hours Beam angle: 25degree(8degree/15degree/45degree optional) Effect: 0~100% dimmer, 0~20Hzstrobe Agreement: DMX-512 Control mode: DMX-512 control mode, auto-run and master/slave control mode IP rating: IP67 Working temperature: -25centigrade ~+35centigrade Housing material: aluminum die-casting

PACKAGE			
Package	carton	**Pcs/ctn**	1pc/ctn
Ctn size	275*240*280mm	**N.W/G.W**	7kg/8kg

Full Color LED Sky Backdrop Light

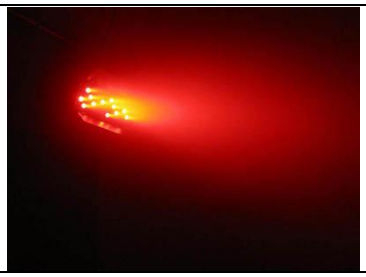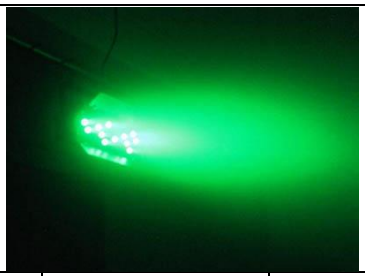
Origin	Guangzhou, P. R. China	**Trademark**	**VanGaa**
Mode No.	VG-LB483B	**Ref. code**	
TRADE TERMS			
Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	1piece
Unit price	48pcsx3W US$:		

DESCRIPTION	
This LED Sky Backdrop light adopts plate material sheel made with beautiful shape, high efficiency and energy saving, durability, it is suitable for indoor use. This product strictly according to CE standard design and production, complete with international standard DMX512 agreement,	50,000hours; High-efficiency, power-saving, low heat. **Specifications** Input power: AC100~240V, 47~60Hz(Using power switching supply)

both single machine control, also can be controlled by connected with, suitable for large art performance, theatres, studio, discos and other places of use. **Features** 8 DMX control channels, digital show control panel; DMX512, Sound active, auto-run and master/slave four kinds control mode; IP20 protect rating; With strobe stage effect; Long lifespan high brightness LEDs can reach to	Power consumption: 150W Light sources: 48pcs 3W high brightness LEDs, (R:12, G:12, B:12, W:12); Beam angle: 25degree Lifespan: 50,000hours Control signal: DMX-512 DMX channels: 8CH Control mode: auto-run, sound active, mater-slave control mode, DMX-512 control mode Body size: 450*140*200mm

PACKAGE

Package	carton	**Pcs/ctn**	1pc/ctn
Ctn size	515*215*325mm	**N.W/G.W**	5.5kg/6.5kg

48pcs LEDs Warm Color LED Sky Backdrop Light






Origin	Guangzhou, P. R. China	**Trademark**	**VanGaa**
Mode No.	VG-LB483F	**Ref. code**	

TRADE TERMS

Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	1piece
Unit price	48pcsx3W US$:		

DESCRIPTION

This LED Sky Backdrop light adopts plate material sheel made with beautiful shape, high efficiency and energy saving, durability, it is suitable for indoor use. This product strictly according to CE standard design and production, complete with international standard DMX512 agreement, both single machine control, also can be controlled by connected with, suitable for large art performance, theatres, studio, discos and other places of use. **Features** 2 DMX control channels, digital show control panel; DMX512, Sound active, auto-run and master/slave four kinds control mode; IP20 protect rating; With strobe stage effect; Long lifespan high brightness LEDs can reach to	50,000hours; High-efficiency, power-saving, low heat. **Specifications** Input power: AC100~240V, 47~60Hz(Using power switching supply) Power consumption: 150W Light sources: 48pcs 3W warm white(color temperature 2800~3000K) LEDs; Beam angle: 25degree Lifespan: 50,000hours Control signal: DMX-512 DMX channels: 2CH Control mode: auto-run, sound active, mater-slave control mode, DMX-512 control mode Body size: 450*140*200mm

PACKAGE			
Package	carton	**Pcs/ctn**	1pc/ctn
Ctn size	515*215*325mm	**N.W/G.W**	5.5kg/6.5kg

48pcs LEDs Cold Color Sky Backdrop Light






Origin	Guangzhou, P. R. China	**Trademark**	**VanGaa**
Mode No.	VG-LB483E	**Ref. code**	
TRADE TERMS			
Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	1piece
Unit price	48pcsx3W US$:		

DESCRIPTION

Features

2 DMX control channels, digital show control panel;
DMX512, Sound active, auto-run and master/slave four kinds control mode;
IP20 protect rating;
With strobe stage effect;
Long lifespan high brightness LEDs can reach to 50,000hours;
High-efficiency, power-saving, low heat.

Specifications

Input power: AC100~240V, 47~60Hz(Using power switching supply)
Power consumption: 150W
Light sources: 48pcs 3W cold white(color temperature 5600~6300K) LEDs;
Beam angle: 25degree
Lifespan: 50,000hours
Control signal: DMX-512
DMX channels: 2CH
Control mode: auto-run, sound active, mater-slave control mode, DMX-512 control mode
Body size: 450*140*200mm

PACKAGE			
Package	carton	**Pcs/ctn**	1pc/ctn
Ctn size	515*215*325mm	**N.W/G.W**	5.5kg/6.5kg

36pcs LEDs 3W Outdoor LED PAR Light







Origin	Guangzhou, P. R. China	**Trademark**	**VanGaa**

Mode No.	VG-LP363A	**Ref. code**	
TRADE TERMS			
Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	1 piece
Unit price	US$:		

DESCRIPTION

Features

RGB prefect color mixture, built-in programs, auto-run mode, international standard DMX-512 control;
DMX-512 control mode, master-slave control mode, auto-run and built-in programs run mode four different operate mode;
International standard DMX-512 control signal, compatible with different products from different manufactures and different controller, intelligent automatic location ID, address can be automatic set;
0~255% dimmer, fade-in and fade-out time minimum above 100 milliseconds;
Synchronous or random electronic strobe speed variable, with fade-in and fade-out pulse strobe effects;
Heat conduction cycle flow cooling system heat dissipation;
Light body takes four digital LCD panels adjust control;
Die-casting aluminum alloy enclosure, installation location can be arbitrary adjustment.
level, single color and full color

Specifications

Input power: DC24V/AC90~240V, 50/60Hz(Using power switching supply)
Power consumption: 120W
Light sources: 36pcs 3W high power LEDs, (R:12; G:12; B:12)
Lifespan: 60,000hours
Beam angle: 25degree(8degree/15degree/45degree are optional)
LED drive: 350/700MA constant current drive
Control signal: DMX-512
DMX channels: 6CH
Control mode: auto-run, sound active, mater/slave, DMX-512 control mode
Housing material: die-casing aluminium light sheel, tempered glass surface cover, polyester powder coating surface
View distance: more than 20~30 meters
IP rating: IP65
Color effect: chasing, jumping, water; 256 grade gray
Body size: 300*215*330

PACKAGE

Package	carton	**Pcs/ctn**	1pc/ctn
Ctn size	260(L)*260(W)*365(H)mm	**N.W/G.W**	3.5kg/4kg

36pcs Indoor LED Par Light








Origin	Guangzhou, P. R. China	**Trademark**	**VanGaa**
Mode No.	VG-LPI363A	**Ref. code**	
TRADE TERMS			
Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	1piece

Unit price	36x3W US$:		
DESCRIPTION			
This high-power LED PAR light adopts aluminum shell made with beautiful shape, high efficiency and energy saving, durability, it is suitable for indoor use. This product strictly according to CE standard design and production, complete with international standard DMX512 agreement, both single machine control, also can be controlled by connected with, suitable for large art performance, theatres, studio, discos and other places of use. **Features** RGB prefect color mixture, built-in programs, auto-run mode, international standard DMX-512 control; DMX-512 control mode, master-slave control mode, auto-run and built-in programs run mode four different operate mode; International standard DMX-512 control signal, compatible with different products from different manufactures and different controller, intelligent automatic location ID, address can be automatic set; 0~255% dimmer, fade-in and fade-out time minimum above 100 milliseconds;		Synchronous or random electronic strobe speed variable, with fade-in and fade-out pulse strobe effects; Heat conduction cycle flow cooling system heat dissipation; Light body takes four digital LCD panels adjust control; Die-casting aluminum alloy enclosure, installation location can be arbitrary adjustment. **Specifications** Input power: AC90~240V, 50/60Hz(Using power switching supply) Power consumption: 120W Light sources: 36pcs 3W EDISON LEDs, (R:12; G:12; B:12), Beam angle: □8°, □15°, □25°, □45° optional Lifespan: 60,000hours Control signal: DMX-512 DMX channels: 6CH Control mode: auto-run, sound active, mater-slave control mode, DMX-512 control mode	
PACKAGE			
Package	carton	**Pcs/ctn**	1pc/ctn
Ctn size	300*215*330mm	**N.W/G.W**	3.5kg/4kg

Outdoor LED PAR Light (36PCS)







Origin	Guangzhou, P. R. China	**Trademark**	**VanGaa**
Mode No.	VG-LP361	**Ref. code**	
TRADE TERMS			
Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	1 piece
Unit price	36x1W US$:		
DESCRIPTION			
Features Advantages of LED-technology: extremely long life, low power consumption, minimal heat emission, and		Dip switches for adjusting the DMX-starting address Built-in sequence DMX-control via every standard DMX-controller.	

maintenance free with brilliant light radiation; Equipped with 36 x 1 W LEDs: 12 x red, 12 x blue, 12x green high power LEDs made by EDISON; 100 000 hours LED life; Continuous RGB color changing; Pure convection cooling via cooling ribs, no fans; DMX-controlled operation or stand alone operation with Master/Slave-function together; Have three kinds of strobe effect (random strobe, pulse-effect in sequences, strobe effect); 8 built-in programs can be called up via DMX controller and Custom-programs; Rainbow-effect with adjustable speed;	**Specifications** Input power: AC110V/220V, 50/60Hz Power consumption: 40W LEDs: 36pcs 1W LEDs, (R: 12, G: 12, B: 12) Beam Angle: 8 ° 16 ° 25 ° 35 ° 45 ° 60 ° Control mode: Master/slave mode, Auto programs, Built-in program(7fix, 7 programmable) Auto-Mode: automatic ID, addressing separately & automatic ID addressing in groups; DMX channels: 8 CH/ 9 CH IP rating: IP 65 Shell color: black (silver in preparation)

PACKAGE

Package	carton	**Pcs/ctn**	1pc/ctn
Ctn size	122*288*276mm	**N.W/G.W**	3kg/3.5kg
Package	Flight case	**Pcs/ctn**	8pcs/ctn
Ctn size	1070*565*552mm	**N.W/G.W**	40kg/60kg

36pcs LEDs LED Par 64 Light(Short)




Origin	Guangzhou, P. R. China	**Trademark**	**VANGAA**
Mode No.	VG-LP364A	**Ref. code**	

TRADE TERMS

Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	1piece
Unit price	36pcsx1W US$: 36pcsx3W US$:		


DESCRIPTION

Combining the features of the LED energy-saving and environment-protective, using 36pcs high brightness LEDs to make this LED Par64 light. High-efficiency, power-saving, low heat. It is applying for the stage, big show, church, party, wedding, indoor using and other places. It has strobe, change color, chase, jump, pulse and other common stage effect functions, and with DMX512, sound active, master/slave, auto-run four kinds control modes. **Features**	Cover: White or Black color. **Specifications** Input power: AC110V/220V, 50/60Hz Power consumption: 36W/108W LEDs: 36pcs 1W or 3W high brightness LEDs, (R:12; G:12; B:12) Beam angle: 25degree Lifespan: 60,000 hours. Control signal: DMX-512 DMX channels: 7CH

RGB Infinite color mixing possibility; LED Control panel; Output distance:10meters;		IP rating: IP20 Control mode: Auto-run, Sound active, Master/Slave, DMX512;	
PACKAGE			
Package	Carton box	**Pcs/ctn**	1Pcs/carton
Ctn size	260*260*380mm	**N.W/G.W**	3kg/4kg

36pcs LEDs RGBW Par64 Light(Short)







Origin	Guangzhou, P. R. China	**Trademark**	**VANGAA**
Mode No.	VG-LP364B	**Ref. code**	
TRADE TERMS			
Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	1piece
Unit price	36pcsx1W US$: 36pcsx3W1 US$:		
DESCRIPTION			
Combining the features of the LED energy-saving and environment-protective, using 36pcs high brightness LEDs to make this LED Par64 light. It is applying for the stage, big show, church, party, wedding, indoor using and other places. It has strobe, change color, chase, jump, pulse and other common stage effect functions, and with DMX512, sound active, master/slave, auto-run four kinds control modes. **Features** RGB Infinite color mixing possibility; LED Control panel; Output distance:10meters; Cover: White or Black color.		**Specifications** Input power: AC110V/220V, 50/60Hz Power consumption: 36W/108W LEDs: 36pcs 1W or 3W High brightness LEDs, (R6, G12, B12,W6) Beam angle: 25° /35° Lifespan: 60, 000000, 000 hours. Control signal: DMX-512 DMX channels: 8CH Control mode: Auto-run, sound active, Master/Slave, DMX512; Body size: 320*225*335	
PACKAGE			
Package	Carton box or flight case	**Pcs/ctn**	1Pcs/case
Ctn size	220*220*320mm	**N.W/G.W**	3kg/4kg

3-in-1 Full Color LED Par Light






Origin	Guangzhou, P. R. China	**Trademark**	**VanGaa**
Mode No.	VG-LP183C	**Ref. code**	
TRADE TERMS			
Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	1 piece
Unit price	**US$:**		
DESCRIPTION			

This light has beautiful appearance, high efficiency, save electricity, durable, low heat dissipation, portable and other features. It meets the international standard DMX512 agreement, can controlled single and connected each other. It's suitable for large art performance, theater, studio, disco, hotels and other places.

Features

7 DMX control channels, LCD digital control panel show;
DMX-512, Master/slave control mode and auto-run three control modes;
IP rating: IP65;
With strobe function;
Long lifespan can reach to 50,000hours;
High efficiency, save electricity and low heat dissipation.

Specifications

Input power: AC100~240V, 47~60Hz
Power consumption: 60W
Light source: 18pcs high brightness 3-in-1 full color LEDs
Body size: 270*210*265mm

PACKAGE			
Package	carton	**Pcs/ctn**	1pc/ctn
Ctn size	260*260*300mm	**N.W/G.W**	4.5kg/5.5kg

BACK TOP

LED CITY COLOR LIGHT SERIES

24pcs 3-in-1 LEDs Wall Wash Light






Origin	Guangzhou, P. R. China	**Trademark**	**VanGaa**
Mode No.	VG-LC243C	**Ref. code**	
TRADE TERMS			
Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	1 piece
Unit price	**US$:**		
DESCRIPTION			

This LED City Color/Wall Washer has the good illumination and wonderful color change, using multiple waterproof designs to meet the IP65's requirement. It is suitable for bridges, buildings, roads and urban CBD parks outdoor dyeing beautification adornment and hotel, exhibition hall, KTV, bath center and other leisure entertainment indoor artistic lighting apply. **Features** Equipped with 24pcs 3-in-1 3W LED lamps, high brightness; With waterproof LED tube control panel, outdoor using long time; Seat 120degree adjustment for the light beam angle. **Specifications**	Input power: AC90~240V, 50/60Hz Power consumption: 75W Light sources: 24pcs high brightness 3-in-1 3W LED lamps, (Red:24; Green:24; Blue:24) Lifespan: more than 50,000hours Beam angle: 25degree Working mode: DMX-512 control, auto-run, master/slave control mode DMX channels: 5CH IP rating: IP65 Body size: 1033*88*88mm Inner carton box packing size:1150*95*95mm(1pc/box) N.W/G.W: 3.5kg/4kg

PACKAGE

Package	carton	**Pcs/ctn**	1pc/ctn
Ctn size	1180*500*220mm	**N.W/G.W**	35kg/42kg

LED City Color Light






Origin	Guangzhou, P. R. China	**Trademark**	**VanGaa**
Mode No.	VG-LC4815C	**Ref. code**	

TRADE TERMS

Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	1 piece
Unit price	**US$:**		

DESCRIPTION

Features Using switching power supply, constant current drive; Smooth RGBW or RGBA Color Mixing System; 0~100% electronic linear dimmer; 0~20/s high speed electronic strobe; Full color mixing in standalone, master/slave and DMX modes; Smooth RGB Color mixed to be more than 16.7million kinds of color; Built-in automated programs via Master/Slave; Color Preset, Standalone Color Mixing; Built-in Convection Heat Transfer Cooling System;	LED display control menu; Both indoor and outdoor using. **Specifications** Input voltage: AC90~260V, 50/60Hz Power consumption: 950W Light sources: 48pcs 3-in-1 15W LED Lamps DMX channels: 8CH Beam angle: 25degree(35degree/45degree optional) Protocol: USITI DMX-512 Control mode: DMX-512, Master/slave control mode, Standalone, Sound active Refresh Rate: >400Hz Flicker-Free

Die-Casting Aluminum Housing (Black); 3-pin DMX-in and DMX-out, equipped waterproof connector(IP65);	IP rating: IP65 Input 3-pin XLR Male and Output 3-pin XLR Female connector

PACKAGE			
Package		**Pcs/ctn**	1unit/case
Case size	mm	**N.W/G.W**	kg/kg

LED City Color Light




Origin	Guangzhou, P. R. China	**Trademark**	**VanGaa**
Mode No.	VG-LC4810D	**Ref. code**	
TRADE TERMS			
Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	1 piece
Unit price	**US$:**		

DESCRIPTION

Features Using switching power supply, constant current drive; Smooth RGBW or RGBA Color Mixing System; 0~100% electronic linear dimmer; 0~20/s high speed electronic strobe; Full color mixing in standalone, master/slave and DMX modes; Smooth RGB Color mixed to be more than 16.7million kinds of color; Built-in automated programs via Master/Slave; Color Preset, Standalone Color Mixing; Built-in Convection Heat Transfer Cooling System; Die-Casting Aluminum Housing (Black); 3-pin DMX-in and DMX-out, equipped waterproof connector(IP65);	LED display control menu; Both indoor and outdoor using. **Specifications** Input voltage: AC90~260V, 50/60Hz Power consumption: 600W Light sources: 48pcs 4-in-1 10W LED Lamps DMX channels: 8CH Beam angle: 25degree(35degree/45degree optional) Protocol: USITI DMX-512 Control mode: DMX-512, Master/slave control mode, Standalone, Sound active Refresh Rate: >400Hz Flicker-Free IP rating: IP65 Input 3-pin XLR Male and Output 3-pin XLR Female connector

PACKAGE			
Package		**Pcs/ctn**	1unit/case
Case size	mm	**N.W/G.W**	kg/kg

LED Wall Wash Light

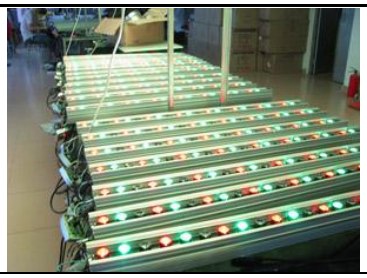

Origin	Guangzhou, P. R. China	**Trademark**	**VanGaa**
Mode No.	VG-LC361A	**Ref. code**	
TRADE TERMS			
Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	1 piece
Unit price	**US$:**		

DESCRIPTION

Features

Equipped 36pcs 1W high brightness LED Lamps, each of red, green and blue is 12pcs;

High brightness, low power consumption, the illumination of this light can reach to the 100 watt traditional lamp, and save 70% energy. At the same time, it has the color change, dimmer, strobe and other functions;

Waterproof design, can be used in outdoor building dyeing or outdoor performance background staining;

Radiator cooling without fan, no noise, suitable for the environment of the high noise require, such as the studio etc;

The LED lamps using constant current drive to lengthen the lifespan;

High-speed chip design, the flicker frequency more than 400 Hertz, in photography camera, camera flicker free;

The LED use special chip, hyperfine dimming, no jitter;

Digital display control panel, high optical lens, mixed colors excellent, the angle of the lens optional;

The built-in programs can be run automatically, can choose single color, mixture colors, full brightness, strobe, chase, gradual change, brightness or speed adjustment;

It's can be controlled alone, but also can many set lights controlled together;

5 DMX channels, the red, green, blue colors can be dimmer and strobe alone. Built-in high quality SMT type control panel. It can be connected with the DMX controller directly, without any external intermediate type DMX controller.

Specifications

Input power: AC100~240V, 50/60Hz (Equipped 24V, 80W high quality switching power supply)

Power consumption: 36W

Light sources: 36pcs 1W high brightness LED Lamps, (R: 12; G:12; B:12)

Lifespan: more than 50,000hours

Beam angle: 25 degree (8degree/15degree/45degree are optional)

Control mode: DMX-512, auto-run, master-slave control mode

DMX channel: 5CH

IP rating: IP65

Body size: 1200*78*116mm

PACKAGE

Package	carton	**Pcs/ctn**	1pc/ctn
Ctn size	1208*110*130mm	**N.W/G.W**	4.3kg/5.1kg

LED Wall Wash Light





Origin	Guangzhou, P. R. China	**Trademark**	**VanGaa**
Mode No.	VG-LC361B	**Ref. code**	
TRADE TERMS			
Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	1 piece
Unit price	**US$:**		

DESCRIPTION

Features

Equipped 36pcs 1W high brightness LED Lamps, each of red, green and blue is 12pcs;

High brightness, low power consumption, the illumination of this light can reach to the 100 watt traditional lamp, and save 70% energy. At the same time, it has the color change, dimmer, strobe and other functions;

Waterproof design, can be used in outdoor building dyeing or outdoor performance background staining;

Radiator cooling without fan, no noise, suitable for the environment of the high noise require, such as the studio etc;

The LED lamps using constant current drive to lengthen the lifespan;

High-speed chip design, the flicker frequency more than 400 Hertz, in photography camera, camera flicker free;

The LED use special chip, hyperfine dimming, no jitter;

Digital display control panel, high optical lens, mixed colors excellent, the angle of the lens optional;

The built-in programs can be run automatically, can choose single color, mixture colors, full brightness, strobe, chase, gradual change, brightness or speed adjustment;

It's can be controlled alone, but also can many set lights controlled together;

5 DMX channels, the red, green, blue colors can be dimmer and strobe alone. Built-in high quality SMT type control panel. It can be connected with the DMX controller directly, without any external intermediate type DMX controller.

Specifications

Input power: AC100~240V, 50/60Hz (Equipped 24V, 80W high quality switching power supply)

Power consumption: 36W

Light sources: 36pcs 1W high brightness LED Lamps, (R: 12; G:12; B:12)

Lifespan: more than 50,000hours

Beam angle: 25 degree (8degree/15degree/45degree are optional)

Control mode: DMX-512, auto-run, master-slave control mode

DMX channel: 5CH


IP rating: IP65

Body size: 1200*78*116mm

PACKAGE

Package	carton	**Pcs/ctn**	1pc/ctn
Ctn size	1208*110*130mm	**N.W/G.W**	4.3kg/5.1kg

LED City Color Light

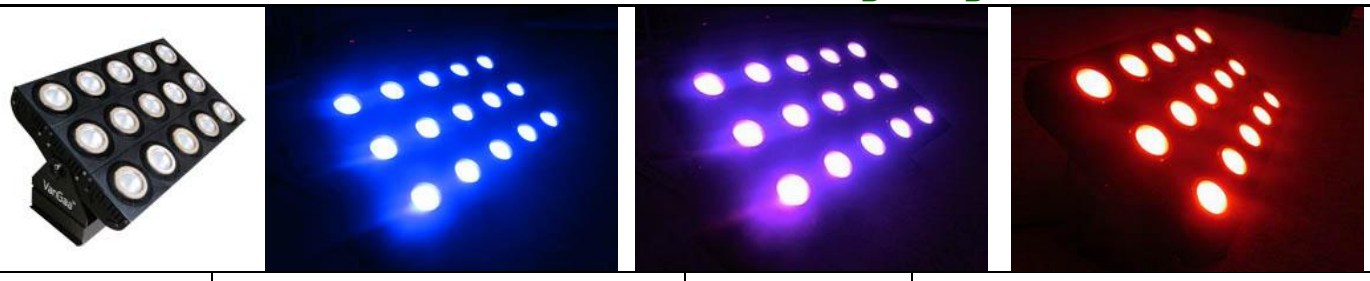

Origin	Guangzhou, P. R. China	**Trademark**	**VanGaa**
Mode No.	VG-LC15C	**Ref. code**	
TRADE TERMS			
Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	1 piece
Unit price	**US$:**		

DESCRIPTION

Features

Using switching power supply, constant current drive;
Smooth RGBW or RGBA Color Mixing System;
0~100% electronic linear dimmer;
0~20/s high speed electronic strobe;
Full color mixing in standalone, master/slave and DMX modes;
Built-in automated programs via Master/Slave;
Color Preset, Standalone Color Mixing
No fan and no noise;
3-pin DMX-in and DMX-out, equipped waterproof connector(IP65);
Both indoor and outdoor using.

Specifications

Input power: AC90~260V, 50/60Hz(Using switching power supply)
Power consumption: 300W
Light sources: 15pcs 3-in-1 15W LED Lamps
Lifespan: over50,000 hours
DMX channels: 8CH
Control mode: DMX-512, Master/slave, Stand alone, Sound active
Beam angle: 25degree(30degree/45degree/60degree optional)
Refresh Rate: >400Hz Flicker-Free
IP rating: IP65
Input 3-pin XLR Male and Output 3-pin XLR Female connector
Net weight: 22kg

PACKAGE

Package	Carton board box	**Pcs/ctn**	1unit/case
Case size	620*400*280mm	**N.W/G.W**	22kg/24kg

LED City Color Light



Origin	Guangzhou, P. R. China	**Trademark**	**VanGaa**
Mode No.	VG-LC815C	**Ref. code**	
TRADE TERMS			
Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000

Price term	Ex-work	**MQO**	1 piece
Unit price	**US$:**		
DESCRIPTION			

Features

Using switching power supply, constant current drive;
Smooth RGBW or RGBA Color Mixing System;
0~100% electronic linear dimmer;
0~20/s high speed electronic strobe;
Full color mixing in standalone, master/slave and DMX modes;
Built-in automated programs via Master/Slave;
Color Preset, Standalone Color Mixing
No fan and no noise;
3-pin DMX-in and DMX-out, equipped waterproof connector(IP65);
Both indoor and outdoor using.

Specifications

Input power: AC90~260V, 50/60Hz(Using switching power supply)
Power consumption: 150W
Light sources: 8pcs 3-in-1 15W LEDs
Lifespan: over50,000 hours
DMX channels: 8CH
Control mode: DMX-512, Master/slave, Stand alone, Sound active
Beam angle: 25degree(15degree/35degree/45degree/60degree optional)
Refresh Rate: >400Hz Flicker-Free
IP rating: IP65
Input 3-pin XLR Male and Output 3-pin XLR Female connector
Net weight: 10kg

PACKAGE			
Package	Carton board box	**Pcs/ctn**	1unit/case
Case size	900*210*280mm	**N.W/G.W**	10kg/12kg

Small LED City Color Light



Origin	Guangzhou, P. R. China	**Trademark**	**VanGaa**
Mode No.	VG-LC605A	**Ref. code**	
TRADE TERMS			
Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	1 piece
Unit price	**US$:**		
DESCRIPTION			

Features

With DMX-512 control, Auto-run, Master/slave control, Sound active 4 kinds control modes;
Excellent single color and RGB color mixing;
Can work independent and generate various color change effects;
With waterproof function can be used for outdoor.
Lifespan: over 50,000hours
Beam angle: 25degree(15degree/30degree/38degree/45degree are optional)
DMX channels: 7CH
Irradiation distance: 20meters
Condition temperature: 18centigrade~40centigrade

Specifications Input power: AC90~260V, 50/60Hz Power consumption: 240W Light sources: 60pcs 5W High brightness LED Lamps, (R: 20, G:20, B:20)		Working temperature: -5centigrade~30centigrade Signal plug: 3XLR data input& output IP rating: IP65 N.W: 9kg	
PACKAGE			
Package	Carton board box	**Pcs/ctn**	1unit/case
Case size	755*590*380mm	**N.W/G.W**	9kg/12kg


Small LED City Color Light






Origin	Guangzhou, P. R. China	**Trademark**	**VanGaa**
Mode No.	VG-LC725A	**Ref. code**	
TRADE TERMS			
Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	1 piece
Unit price	**US$:**		
DESCRIPTION			
Features With DMX-512 control, Auto-run, Master/slave control, Sound active 4 kinds control modes; Excellent single color and RGB color mixing; Can work independent and generate various color change effects; With waterproof function can be used for outdoor. **Specifications** Input power: AC90~260V, 50/60Hz Power consumption: 390W Light sources: 72pcs 5W High brightness LED Lamps, (R: 24, G:24, B:24)		Lifespan: over 50,000hours Beam angle: 25degree(15degree/30degree/38degree/45degree are optional) DMX channels: 7CH Irradiation distance: 20meters Condition temperature: 18centigrade~40centigrade Working temperature: -5centigrade~30centigrade Signal plug: 3XLR data input& output IP rating: IP65 N.W: 9kg	
PACKAGE			
Package	Carton board box	**Pcs/ctn**	1unit/case
Case size	755*590*380mm	**N.W/G.W**	9kg/12kg

iRolling LED Rotation Bar Light

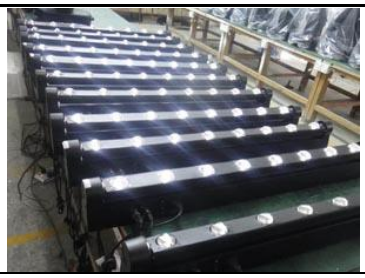

Origin	Guangzhou, P. R. China	**Trademark**	**VanGaa**
Mode No.	Rolling 83	**Ref. code**	
TRADE TERMS			
Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	1 piece
Unit price	**US$:**		

DESCRIPTION

This LED Rotation Bar Light has very brightness and narrow light beam, the beam can be the light beam curtain, and it also can be rotation controlled. It's widely used for the stage performance, shopping declaration, party, celebration, and other area.

Features

With very brightness beam curtain;
The beam curtain can be rotated;
The rotation angle can be 270degree;
DMX control with very wonderful stage effect.

Specifications

Input power: AC110V~220V, 50/60Hz
Power consumption: 30W
Light sources: 8pcs 3W high brightness white color LED lamps
Color of beam: white
DMX channels: 13CH
Control mode: DMX-512, Master/slave control mode, auto-run, Sound active
Rotation angle: 270degree

PACKAGE

Package	Carton board box	**Pcs/ctn**	1unit/case
Case size	1080*85*150mm	**N.W/G.W**	9kg/12kg

High Power Waterproof LED Wall Wash Light








Origin	Guangzhou, P. R. China	**Trademark**	**VanGaa**
Mode No.	VG-LC192C	**Ref. code**	
TRADE TERMS			
Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	1 piece
Unit price	**US$:**		

DESCRIPTION

This light is **Powerful** and **Brightness,** two heads and has good beam effect. It's widely used for the outside wall of

Light Source: 192pcs high power 3-in-1 LED Lamps
Drive current 1000mA(GBW)/700mA(RA)

hotels, high buildings, bridges, roads and wash color for the TV stations, holiday villages, garden, scenic spots and other performances place. With high brightness and good color change, it's very popular for the urban beautification. **Features** Output lumens: 18000(5 meters); Max. distance: 300m; the best color mixing effect and light beam is 60~110meters; Color Range: 16.7million additive RGB colors whit full saturation control; Lens Plate Tempered glass; With temperature control protection; Two heads the light beams angle adjustable; Fixture Connection Data in/out, Power in. **Specifications** Input voltage: AC100~240V, 50/60Hz Power consumption: 680W max at full output	Control On-board Display for STATIC COLOR, AUTO and CUSTOM control Control Protocol DMX512 DMX Control Mode and Channel: STAG Mode(10CH), ARC.1 Mode(3CH), AR1.dMode(4CH), AR1.S Mode(5CH), HSV Mode(3CH) Dimmer: 0~100%; strobe: 0~20Hz IP rating: IP67 Beam angle: 25degree(30degree/45degree optional) Environment: Dry/Damp/Wet location, IP65 (with LED display cover installed) Operation temperature: -40 °~45 °(operating), -20 °~50 °(startup) Housing: die-cast aluminum, power-coated finish Packing: wooden case/flight case Dimensions: 719*252*563mm(1unit/wooden case) N.W/G.W: 35kg/50kg

PACKAGE

Package	Flight case	**Pcs/ctn**	1unit/case
Case size	680*420*850mm	**N.W/G.W**	35kg/60kg

18W LED Wall Wash Light






Origin	Guangzhou, P. R. China	**Trademark**	**VanGaa**
Mode No.	VG-LC181	**Ref. code**	

TRADE TERMS

Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	4piece
Unit price	18x1W US$:		

DESCRIPTION

This product has the good illumination and wonderful color change, using multiple waterproof designs to meet the IP65's requirement. It is suitable for bridges, buildings, roads and urban CBD parks outdoor dyeing beautification adornment and hotel, exhibition hall, KTV, bath center and other leisure entertainment indoor artistic lighting apply. **Features** With the power supply inside;	·Using Distance: ≤10M Lifetime: 100,000 Hours DMX agreement: Standard DMX 512 Agreement Control mode: DMX-512; Auto-run; Master/slave control; Infrared remote location Color temperature: monochrome/colorful CRI: >85 Lighting render: 90lm/W

Aluminum appearance with elegant looking;, Waterproof one. **Specifications** Input power: AC110V/220V, 50/60Hz Power consumption: 25W LEDs: 18pcs 1W EDISON LEDs, (R: 6; G: 6; B: 6) Beam angle: 20 ° 45 ° 60 ° Mixing Color: 256×256×256 Wavelength: R:620-630nm; G:515-535nm; B:460-475nm	Power factor: >0.95 DMX channels: 4CH Working temperature: -18℃~40 ℃(0℉~+104℉) Shell material: 6063#aluminum+transparent toughened glass DMX signal cable: 4 Pin Waterproof Signal Cable Drive current: 350mA Constant current drive IP rating: IP65

PACKAGE

Package	carton	**Pcs/ctn**	1pc/ctn
Ctn size	mm	**N.W/G.W**	kg/kg

27W LED Wall Wash Light





Origin	Guangzhou, P. R. China	**Trademark**	**VanGaa**
Mode No.	VG-LC271	**Ref. code**	

TRADE TERMS

Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	4piece
Unit price	27x1W US$:		


DESCRIPTION

This product has the good illumination and wonderful color change, using multiple waterproof designs to meet the IP65's requirement. It is suitable for bridges, buildings, roads and urban CBD parks outdoor dyeing beautification adornment and hotel, exhibition hall, KTV, bath center and other leisure entertainment indoor artistic lighting apply. **Features** With the power supply inside; Aluminum appearance with elegant looking;, Waterproof one. **Specifications** Input power: AC110V/220V, 50/60Hz Power consumption: 30W LEDs: 27pcs 1W EDISON LEDs, (R: 9; G: 9; B: 9) Beam angle: 20 ° 45 ° 60 ° Mixing Color: 256×256×256	·Using Distance: ≤10M Lifetime: 100,000 Hours DMX agreement: Standard DMX 512 Agreement Control mode: DMX-512; Auto-run; Master/slave control; Infrared remote location Color temperature: monochrome/colorful CRI: >85 Lighting render: 90lm/W Power factor: >0.95 DMX channels: 4CH Working temperature: -18℃~40 ℃(0℉~+104℉) Shell material: 6063#aluminum+transparent toughened glass DMX signal cable: 4 Pin Waterproof Signal Cable Drive current: 350mA Constant current drive IP rating: IP65

Wavelength: R:620-630nm; G:515-535nm; B:460-475nm			
PACKAGE			
Package	carton	**Pcs/ctn**	1pc/ctn
Ctn size	mm	**N.W/G.W**	kg/kg

LED Bar Light



Origin	Guangzhou, P. R. China	**Trademark**	**VanGaa**
Mode No.	VG-LC252	**Ref. code**	
TRADE TERMS			
Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	10piece
Unit price	US$:		
DESCRIPTION			

Specifications

Input voltage: AC110V/220V, 50/60Hz
Power: 50W
LED Qty: 252pcsx10mm LEDs, (R: 84; G: 84; B:84)
Lifespan: 50,000hours
Color: RGB color mixing to thousand million colors
Dimmer/Strobe: Electronic dimmer from 0~100%(No color change) white color or color changing strobe(frequency: 1~13Hz)
Control mode: work auto, master/slave, voice active and DMX-512
DMX Channel: 13CH
With the LED control panel
Size: 1070*65*87mm N.W: 2.1kg

PACKAGE			
Package	carton	**Pcs/ctn**	1pc/ctn
Ctn size	mm	**N.W/G.W**	kg/kg

LED City Color





Origin	Guangzhou, P. R. China	**Trademark**	**VanGaa**
Mode No.	VG-LC150	**Ref. code**	
TRADE TERMS			
Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000

Price term	Ex-work	**MQO**	1piece
Unit price	150pcsx1W US$: 120pcsx3-in-1 US$:		

DESCRIPTION

This light is widely used for the outside wall of hotels, high buildings, bridges, roads and wash color for the TV stations, holiday villages, garden, scenic spots and other performances place. With high brightness and good color change, it's very popular for the urban beautification.

Features

RGB infinite color mixing possibility;
Beam of light angle: 15°/25°;
Irradiation distance: 20M;
Life time: 50000hours;
Always seven colors: Nine levels brightness adjustment with red, yellow, green, blue, cyan purple, white seven colors;
Seven colors changing fast: Seven colors changing fast by turn, nine level speed adjustment;
Seven colors changing gradual: Seven colors strobe by turn, nine level speed adjustment;
Master/Slave: Several equipment connecting together, Slave work per Master;
DMX dimming: Several light equipment get the distribution DMX address signal, the output data in accordance with DMX control change.

Specifications

Input power: AC110/220V, 50/60Hz
Power consumption: 380W
LEDs: 150pcs 1W LEDs (R: 50, G: 50, B: 50), or 120pcs 3-in-1 LEDs
Pan: 540°, Tilt: 270°
Fuse: 2A, 250V
Protocols: DMX-512USITT
DMX channels: 6CH

PACKAGE

Package	Wooden case	**Pcs/ctn**	1pc/case
Ctn size	680*750*810mm	**N.W/G.W**	11kg/15kg

High Power LED City Color






Origin	Guangzhou, P. R. China	**Trademark**	**VanGaa**
Mode No.	VG-LC1503	**Ref. code**	

TRADE TERMS

Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	1piece
Unit price	150pcsx3W US$: 120pcsx3-in-1 US$:		

DESCRIPTION

This light is widely used for the outside wall of hotels, high buildings, bridges, roads and wash color for the TV stations, holiday villages, garden, scenic spots and other performances place. With high brightness and good color change, it's very popular for the urban beautification.

Features

Slave work per Master;
DMX dimming: Several light equipment get the distribution DMX address signal, the output data in accordance with DMX control change.

Specifications

Input power: AC110/220V, 50/60Hz

RGB infinite color mixing possibility; Beam of light angle: 15°/25°; Irradiation distance: 20M; Life time: 50000hours; Always seven colors: Nine levels brightness adjustment with red, yellow, green, blue, cyan purple, white seven colors; Seven colors changing fast: Seven colors changing fast by turn, nine level speed adjustment; Master/Slave: Several equipment connecting together,	Power consumption: 500W LEDs: 150pcs 3W LEDs (R: 50, G: 50, B: 50), or 150pcs 3-in-1 LEDs Pan: 540°, Tilt: 270° Fuse: 2A, 250V Protocols: DMX-512USITT DMX channels: 6CH Wooden case packing size: 680*750*810 mm (1pcs/wooden case) N.W/G.W: 11kg/15kg


PACKAGE

Package	Wooden case	**Pcs/ctn**	1pc/case
Ctn size	680*750*810mm	**N.W/G.W**	11kg/15kg

BACK TOP

LED MOVING HEAD LIGHT SERIES

SWIFT LED Moving Head Light(36pcs 3W CREE LED Lamps)

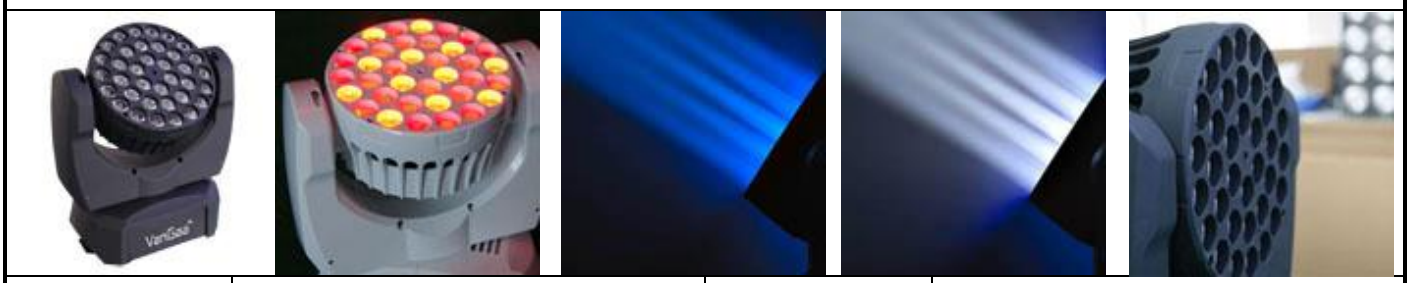

Origin	Guangzhou, P. R. China	**Trademark**	**VanGaa**
Mode No.	SWIFT 121	**Ref. code**	

TRADE TERMS

Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	1 piece
Unit price	**US$:**		

DESCRIPTION

Our SWIFT LED Moving Head is a very small and smart light. But the brightness is very powerful. It owns very good beam light, and very wonderful color mixing effect. As a SWIFT light, it's small, but it runs extremely fast. This light is very suitable for bar, disco, stage, theatre, decoration etc.

Features

Excellent mixed color system;
Smooth dimmer effect;
High power and brightness, equipped 36pcs high power 3W CREE Xp-e LED Lamps;
Tight, puissant and paralleled beam effect;
Compact profile and silent circuit design;

Specifications

Input voltage: AC100~240V, 50/60Hz
Power: 120W
Light sources: 36pcs 3W CREE XP-E LED Lamps, (R:12; G:12; B:12)
LED lifespan: about 50,000hours
Color mixing: R: 0~255; G: 0~255; B: 0~255
Effect: strobe, fade, color wheel
Beam angle: 8degree
Rotation angle: Pan 540degree/630degree, Tilt 240degree, self-correcting
DMX Channels: 5CH, 7CH, 8CH, 9CH, 12CH
Control mode: DMX512; Master/slave; Sound active

Swift pan and tile moving, silent and fast; With blue LCD control display, can use and compatible the library data of MAC Aura; Standard DMX-512 communication protocol; Easy for power connection.	IP rating: IP20 Working environment: indoor Environment temperature: -30~+40centigreed Body size: L242*W130*H289mm Weight: 3.4kg

PACKAGE

Package	carton	**Pcs/ctn**	1pc/ctn
Ctn size	350*190*450mm	**N.W/G.W**	6kg/6kg

108pcs LED Moving Head Zoom Wash Light



Origin	Guangzhou, P. R. China	**Trademark**	**VanGaa**
Mode No.	VG-LM1083Z	**Ref. code**	

TRADE TERMS

Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	1 piece
Unit price	**US$:**		

DESCRIPTION

Combining the Features of the LED Energy-Saving and environment-protective, using High Efficiency Constant Current & new heat dissipation technology, 256 Grey Scale adjusted and create revise technology to make the Dimmer to be more smooth. It is applying for the Big Show, Stage, Theatre, Out-door Building etc. **Features** With the ZOOM function; Equipped with 108pcs 3W LEDs 100000 hours LED life, Energy-Saving and environment-protective; 15 international DMX-512 channels; 3 kinds control mode: DMX-512 control mode; auto-run; sound active 1~25/s strobe or random strobe; Dimmer channel can control 4 colors at the same time; Well-proportioned RGBA color mixture system and rainbow effect, adjust the color temperature to reach much wonderful by the white LEDs; Beautiful blue and white liquid crystal display;	**Photometric data** Light source: 108pcs 3W LED lamps, (R: 24, G: 24, B: 28, W: 28) LED rated life: 50,000 hours Beam angle: 25degree **Dynamic effects** Color changing effects: Can create excellent color mixing with high even and uniform distribution of brightness and light output Strobe: Variable electronic strobe 0~25F.P.S Dimmer: Variable electronic dimmer 0~100% Pan: 540degree or 630degree (8/16 bit movement resolution), automatic self-correction Tilt: 280degree (8/16 bit movement resolution), automatic self-correction Other features: Electronic strobe with pulse effects **Control and programming** DMX channels: 15 channels (depend on 8/16 bit movement resolution) Protocols: DMX-512

Built-in 8 kinds programs for chose, auto-run or controlled by the DMX-512 Controller; Built-in wireless receive system Can be changed the DMX ID made by the controller, remote switch of the LEDs, reset, sound active and change modes; The display with the rechargeable battery. **Specifications** **Electrical** Power supply: AC110~240V, 50/60Hz Power consumption: 360W Fuse: 5A, 5*20	Operation modes: DMX mode, Master/Slave mode, Sound Activated mode **Construction** Color: Black Housing: ABS Protection rating: IP20 **Thermal** Working temperature: -20centigrade~ +35centigrade Thermostat: Built-in thermostat for overheating protection **Physical** Fixture dimensions:337*228*433mm Net weight: 10kg

PACKAGE

Package	carton	**Pcs/ctn**	1pc/ctn
Ctn size	380*360*250mm	**N.W/G.W**	10kg/11kg

60W Small LED Moving Head Spot Light



Origin	Guangzhou, P. R. China	**Trademark**	**VanGaa**
Mode No.	VG-LM60S	**Ref. code**	

TRADE TERMS

Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	1 piece
Unit price	**US$:**		

DESCRIPTION

Features The luminance is 1520lux(3m), can replace the 250W traditional intelligent moving head light easily; 6 colors add white color, 1 gobo wheel has 7 different gobos; 16 DMX channels, a variety of stage effect combination, meanwhile has the prism effect; Control panel with the digital display. **Specifications** Input power: AC100~240V, 50~60Hz Power consumption: 100W Light sources: 1pcs 60W High brightness LED Lamp	Control mode: DMX-512, Auto-run mode, Master/slave mode DMX channel: 16CH Pan scan: 540degree Tilt scan: 255degree Color wheel: 6 colors Gobo wheel: 7 gobos Prism: triangular prism Control panel display: digital show Focus: automatic focus Signal cable: 3-pin XLR

PACKAGE

Package	carton	**Pcs/ctn**	1pc/ctn
Ctn size	440*415*350mm	**N.W/G.W**	9kg/12kg

90W LED Moving Head Spot Light








Origin	Guangzhou, P. R. China	**Trademark**	**VanGaa**
Mode No.	VG-LM90S	**Ref. code**	
TRADE TERMS			
Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	1 piece
Unit price	**US$:**		

DESCRIPTION

Features

7 dichroic colors plus white, with two direction rainbow effect;

LED lamp source with equal output to 575W discharge;

16 gobos, 2 gobo wheels, the gobo wheel 1:7 rotating/indexing replaceable gobos;

3 metal and 4 glass gobos, gobo wheel 2:9 replaceable static gobos;

Gobo size 27.9mm(outside dimension)/23mm(inside dimension);

3 facet rotating;

Variable speed shutter/strobe, strobe effect with 0~18 flashes per second, 0~100% dimmer.

Specifications

Power Supply

User selectable power supply

Nearly 1/2 power consumption of standard DS250 PRO

240W MAX / 120v-240V 50/60hz

Light Source

1989 Lux / 185 fc at 16 feet / 5 meters at full

LED lamp source with equal output to 575W discharge

Lamp life: 50,000 hours, 6500 °K, CRI=70

Lamp: CBM-360-W LED 90Watt

Optical System

15degree Beam Angle

Motorized focus

Improved optics and flat beam field

Movement

Pan/Tilt 540/630 x 265

Automatic Pan/Tilt correction

Control

18 Channels DMX

LCD display

USITT DMX-512 Complaint

8 built-in programs

16 bit mode

3 operation modes: DMX controlled, stand alone or sound activated

Operation Parameters

Max ambient temperature: 45 ℃

IP Rating: IP20

dB Rating: 55 dB at 3’

Connectors

3-pin DMX connections

Dimensions and Weight

Dimensions: (L*W*H)480*375*375mm

Weight: 11kg/25 lbs

Approvals

CE approved

PACKAGE

Package	carton	**Pcs/ctn**	1pc/ctn
Ctn size	480*375*375mm	**N.W/G.W**	13kg/15kg

90W LED Moving Head Beam Light






Origin	Guangzhou, P. R. China	**Trademark**	**VanGaa**
Mode No.	VG-LM90B	**Ref. code**	

TRADE TERMS

Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	1 piece
Unit price	**US$:**		

DESCRIPTION

To replace 575W traditional computer moving head light, we have researched this new style LED Moving Head Light. It has brightness light beam and clear gobo pattern effect. Using the 90W LED Lamp as the light source, power saving, super low noise of head moving, small sharp to realize fast moving. It's your first choice for your wonderful stage.

Features

color wheel has 8 colors + open, with rainbow effect;
One rotation gobo wheel;
Self gobo wheel: one self-rotation gobo wheel: 7gobos+open;
Color wheel: one color wheel + rainbow effect: 8 colors + open
Dimmer: 0%-100% linearity adjustment;
Strobe: 0-10times/s, the speed of strobe adjustable;
Scan angle: Pan 540degree, Tilt 270degree, with self-correction function;
Demo Function: sound active mode, Auto-run program inside setting stand alone and master/slave operation, with the brightest light.

Specifications

Input voltage: AC100V~220V, 50~60Hz
Light sources: 90W high brightness white LED lamp
Display board: LCD display
DMX Channel: 12CH
Control Mode: standard DMX512 signal, auto-run, master/slave control mode

PACKAGE

Package	carton	**Pcs/ctn**	1pc/ctn
Ctn size	480*375*375mm	**N.W/G.W**	13kg/15kg

30W LED Moving Head Spot Light






Origin	Guangzhou, P. R. China	**Trademark**	**VANGAA**
Mode No.	VG-LM30	**Ref. code**	
TRADE TERMS			
Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	4piece
Unit price	US$:		

DESCRIPTION

Features

7/11 channel DMX-512 LED Moving yoke;
Pan: 540 °,8/16bit, adjustable, electronic correction;
Tilt: 270 °, 8/16bit, adjustable, electronic correction;
7+white+rainbow effect;
0~10/s strobe, adjustable;
0~100% linear dimming;
Special function: Built-in procedures for a variety of lighting effects, can run simultaneously from sound control without controllers;
Optical system: Combination of high-precision quartz lens, so that optical loss is reduced to a minimum;
Protection: all intelligent temperature thermal protection and high-interference with electronic circuits.

Specifications

Input power: AC110~220V, 50/60Hz
Power consumption: 105W
LEDs: 1pcs 30W LED
Pan: 540° , Tilt: 270°
Maximum ambient temperature: 104F(40℃)
Data input: locking 3-pin
XLR male socket data output: locking 3-pin
XLR female socket data pin configuration: pin 1 shield, pin2(-), pin 3(+)
Protocols: DMX-512USITT
DMX channels: 7/11CH

PACKAGE

Package	carton	**Pcs/ctn**	1Pcs/ctn
Ctn size	280*280*370mm	**N.W/G.W**	5kg/6kg

60W MINI LED Moving Head Light







Origin	Guangzhou, P. R. China	**Trademark**	**VANGAA**
Mode No.	VG-LM60	**Ref. code**	
TRADE TERMS			
Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	4piece
Unit price	US$:		

DESCRIPTION

Features

13 channel DMX-512 LED Moving yoke;
Pan: 540 °, 8/16 bit, adjustable, electronic correction;
Tile: 270 °, 8/16 bit, adjustable, electronic correction;

Specifications

Light source: 1pcs 60W LED
Maximum ambient temperature:104F(40℃);
Data input: locking 3-pin XLR male socket data output: locking 3-pin XLR female socket data pin configuration: pin 1 shield, pin1(-), pin3(+);

Input power: AC90~240V, 50/60Hz Power consumption: 90W		Protocols: DMX-512USITT DMX channels: 13CH	
PACKAGE			
Package	carton	**Pcs/ctn**	1Pcs/ctn
Ctn size	280*280*370mm	**N.W/G.W**	7kg/9kg

108pcs LEDs RGB High Power Moving Head Light








Origin	Guangzhou, P. R. China	**Trademark**	**VANGAA**
Mode No.	VG-LM1083A	**Ref. code**	
TRADE TERMS			
Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	1piece
Unit price	108x3W US$:		

DESCRIPTION

Combining the Features of the LED Energy-Saving and environment-protective, using High Efficiency Constant Current & new heat dissipation technology, 256 Grey Scale adjusted and create revise technology to make the Dimmer to be more smooth. It is applying for the Big Show, Stage, Theatre, Out-door Building etc.

Features

Equipped with 108pcs 3W LEDs

100000 hours LED life, Energy-Saving and environment-protective;

10 international DMX-512 channels;

3 kinds control mode: DMX-512 control mode; auto-run; sound active

1~25/s strobe or random strobe;

Dimmer channel can control 4 colors at the same time;

Well-proportioned RGBA color mixture system and rainbow effect, adjust the color temperature to reach much wonderful by the white LEDs;

Beautiful blue and white liquid crystal display;

Built-in 8 kinds programs for chose, auto-run or controlled by the DMX-512 Controller;

Built-in wireless receive system

Can be changed the DMX ID made by the controller, remote switch of the LEDs, reset, sound active and change modes;

The display with the rechargeable battery.

Specifications

Input power: AC90~240V, 50/60Hz(Using switching power supply)

Power consumption: 400W(108X3W)

LEDs: 108pcs 3W EDISON RGB LEDs, (R:36, G:36, B:36)

Beam angle: □8°, □25°, □45° optional

Dimmer: 0~100%

Gray gradient: 4096 grade

Pan: 540°/630°, 8/16 bit adjustment mode, automatic electronic error correction function

Tilt: 270°, 8/16 bit adjustment mode, automatic electronic error correction function

DMX control channel: 10CH/12CH

Control mode: DMX-512control mode; Master-slave control mode; sound active

Working temperature: -25℃~+35℃

PACKAGE

Package	carton	**Pcs/ctn**	1Pcs/ctn
Ctn size	337*228*433mm	**N.W/G.W**	10kg/11kg

108pcs LEDs RGBW High Power Moving Head Light






Origin	Guangzhou, P. R. China	**Trademark**	**VANGAA**
Mode No.	VG-LM1083B	**Ref. code**	
TRADE TERMS			
Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	1piece
Unit price	108x3W US$:		

DESCRIPTION

Features

Equipped with 108pcs 3W LEDs

100000 hours LED life, Energy-Saving and environment-protective;

10 international DMX-512 channels;

3 kinds control mode: DMX-512 control mode; auto-run; sound active

1~25/s strobe or random strobe;

Dimmer channel can control 4 colors at the same time;

Well-proportioned RGBA color mixture system and rainbow effect, adjust the color temperature to reach much wonderful by the white LEDs;

Beautiful blue and white liquid crystal display;

Built-in 8 kinds programs for chose, auto-run or controlled by the DMX-512 Controller;

Built-in wireless receive system

Can be changed the DMX ID made by the controller, remote switch of the LEDs, reset, sound active and change modes;

The display with the rechargeable battery.

Thermostat: Built-in thermostat for overheating protection

Physical

Fixture dimensions:337*228*433mm

Net weight: 10kg

Specifications

Electrical

LED rated life: 50,000 hours

Beam angle: 25degree

Dynamic effects

Color changing effects: Can create excellent color mixing with high even and uniform distribution of brightness and light output

Strobe: Variable electronic strobe 0~25F.P.S

Dimmer: Variable electronic dimmer 0~100%

Photometric data

Light source: 108 pcs 3W LED lamps, (R: 30, G: 30, B: 30, W: 18)

Pan: 540degree or 630degree (8/16 bit movement resolution), automatic self-correction

Tilt: 270degree (8/16 bit movement resolution), automatic self-correction

Other features: Electronic strobe with pulse effects

Control and programming

DMX channels: 11 or 13 channels (depend on 8/16 bit movement resolution)

Protocols: DMX-512

Operation modes: DMX mode, Master/Slave mode, Sound Activated mode

Construction

Color: Black

Housing: ABS

Protection rating: IP20

Power supply: AC100~240V, 50/60Hz Power consumption: 400W Fuse: 5A, 5*20	**Thermal** Working temperature: -20centigrade~ +35centigrade

PACKAGE			
Package	carton	**Pcs/ctn**	1Pcs/ctn
Ctn size	480*360*390mm	**N.W/G.W**	10kg/11kg

120pcs LEDs High Power Moving Head Light






Origin	Guangzhou, P. R. China	**Trademark**	**VANGAA**
Mode No.	VG-LM120	**Ref. code**	

TRADE TERMS			
Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	1piece
Unit price	120x3W US$:		

DESCRIPTION

Features This light equips with 120pcs high brightness LEDs. We use EDISON LED chip as default one. Client also can choose LUXEON K2 high power LED chip or others; Low power consumption, super lumen, rich and splendid color mixed effect; The average service life of every LED reach 100000 hours; DMX-512 control signal, 12 standard channels; Optics lens angle: standard 15; it is also can be choose to 45 angle. **Specifications** Input voltage:AC110-240V,50-60Hz	Power consumption:150W/450W LEDs:120pcs 1W/3W LEDs (Red 24, Green 30, Blue 30, White:32) Beam angle:15 °25 °45 °(Optional) Lifetime:50,000hours Strobe speed:1-18 time/second Working Mode: DMX 512 Signal, Master/Slave, Work Auto, Voice Active DMX Channel:14CH Pan:540 °630 °,16 Bit Tilt: 265 °,16 Bit LCD Blue Display Control Panel Condition Temperature: -20℃~50℃

PACKAGE			
Package	carton	**Pcs/ctn**	1Pcs/ctn
Ctn size	420*450*350mm	**N.W/G.W**	20kg/22kg

LED MINI Moving Head Wash Light






Origin	Guangzhou, P. R. China	**Trademark**	**VANGAA**
Mode No.	VG-LM181	**Ref. code**	
TRADE TERMS			
Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	2piece
Unit price	18x1W US$: 18x3W US$:		

DESCRIPTION

Features

4/12 channel DMX-512 LED Moving yoke;
Pan: 540 °;8/16bit, adjustable, electronic correction;
Tilt: 270 °; 8/16bit, adjustable, electronic correction;
RGB color mixing;
Variable electronic strobe;
Variable electronic dimmer (0~100%);
Vector speed channel for pan/tilt, RGB color mixing and color macros;
Built-in movement macros via master/slave or DMX;
User-selectable basic or advanced operating modes;
User-selectable pan/tilt ranges. Pan: 540°, 360°, 180°; Tilt: 180°, 90°;
Compact and light weight;
LED display menu with invert;
Display auto on/off;
Pan/tilt invert option; Pan cooled.

Specifications

Input power: AC110~220V, 50/60Hz
Power consumption: 20 W or 60W
LEDs: 18pcs 1W/3W EDISON LEDs, (R: 6, G: 6, B: 6)
Pan: 540°, Tilt: 270°
Fuse: 2A, 250V
Maximum ambient temperature: 104F(40℃)
Data input: locking 3-pin
XLR male socket data output: locking 3-pin
XLR female socket data pin configuration: pin 1 shield, pin2(-), pin 3(+)
Protocols: DMX-512USITT
DMX channels: 12CH

PACKAGE

Package	carton	**Pcs/ctn**	2Pcs/ctn
Ctn size	280*280*370mm	**N.W/G.W**	7.2kg/9kg

36pcs LEDs Moving Head Light






Origin	Guangzhou, P. R. China	**Trademark**	**VANGAA**
Mode No.	VG-LM361	**Ref. code**	
TRADE TERMS			
Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000

Price term	Ex-work	**MQO**	1piece
Unit price	36x1W US$: 36x3W US$:		

DESCRIPTION

This traditional 36pcs LED Moving Head Light has passed the market test for more than 5 years. It has high brightness, high quality, good color change and other good features. Although it's an old product, which is very stabilized for the stage using.

Features

RGB colors mixing to thousands of hundreds colors;
Channels details:CH1:PAN Scan; CH2:Tilt Scan; CH3:Strobe;CH4: Dimmer; CH5:Color; CH6:Red; CH7:Green; CH8:Blue; CH9:RGB; CH10:X axis; CH11:Y axis; CH12:XY axis career; CH13:Reset.

Specifications


Input power: AC110~220V, 50/60Hz
Power consumption: 90W/120W
LEDs: 36pcs 1W/3W EDISON LEDs, (R:12; G:12; B:12)
Lifetime:100 thousand hours
Beam angle: 15°, 35°, 45°, 60° optional
PAN: 540degreed
Tilt: 280degreed
Control mode: Work Auto, Voice active, Master/Slave, DMX512
DMX channels: 13CH

PACKAGE

Package	carton	**Pcs/ctn**	1Pcs/ctn
Ctn size	370*350*460mm	**N.W/G.W**	5.5kg/6.5kg

LED MINI Moving Head Spot Light



Origin	Guangzhou, P. R. China	**Trademark**	**VANGAA**
Mode No.	VG-LM018S	**Ref. code**	

TRADE TERMS

Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	4piece
Unit price	US$:		

DESCRIPTION

This MIMI LED Moving Head spot light is an old traditional light, it's very small, easy carry and install, and with good price. It's very useful for the small stage using or home using.

Features

RGB mixed color System;
9 Gobos + White + Rainbow effect;
Focus: Manual focus;
Dimmer: 0~100% linearity adjustment;
Strobe: 0~4 times/Second, Adjustable;
Pan: 540 °;8/16bit, adjustable;

Special Function: Inside set many lighting effect program, can work without controller, sound control at same time;
Protection: Digital over-heat protection and anti-jamming electronic circuit.

Specifications

Input voltage: AC110~220V, 50/60Hz
Power consumption: 50W
LEDs: 1pcs 18W RGB 3-in-1 LED, life span:50000hrs
Control mode: DMX 512; sound control; master/slave control; auto run
DMX channel: 13CH

Tilt: 270 °, 8/16bit, adjustable;		Pan: 540 °, Tilt: 270 °	
PACKAGE			
Package	carton	**Pcs/ctn**	1Pcs/ctn
Ctn size	175*175*260mm	**N.W/G.W**	3.6kg/5kg

LED MINI Moving Head Wash Light





Origin	Guangzhou, P. R. China	**Trademark**	**VANGAA**
Mode No.	VG-LM018W	**Ref. code**	
TRADE TERMS			
Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	4piece
Unit price	US$:		

DESCRIPTION

This MIMI LED Moving Head Wash Light is an old traditional light, it's very small, easy carry and install, and with good price. It's very useful for the small stage using or home using.

Features

5 or 13-channel DMX-512 LED moving yoke color wash;
Pan: 540 °/ tilt: 270 °;
RGB color mixing;
Variable electronic strobe;
Variable electronic dimmer (0 100%);
Vector speed channel for pan/tilt, RGB color mixing and color macros;
Built-in movement macros via master/slave or DMX;
Built-in automated programs via master/slave (fast and slow);
Built-in sound activated programs via master/slave;
User-selectable basic or advanced operating modes;
User-selectable pan/tilt ranges;
Pan: 540 °, 360 °, 180 °;
Tilt: 270 °, 180 °, 90 °;
Compact and light weight;
LED display with on, off, auto settings;
Reset to factory settings option;
Pan/tilt invert option;
Fan cooled.

Specifications

Input power: AC90~240V, 50/60Hz
Power consumption: 50W
LEDs: 1pcs 18W RGB 3-in-1 LED, 50,000hours lifespan
DMX channels: 4 or 12CH
Pan: 540 °, Tilt: 270 °

PACKAGE			
Package	carton	**Pcs/ctn**	1Pcs/ctn
Ctn size	175*175*260mm	**N.W/G.W**	3.6kg/5kg

36pcs LEDs Moving Head Light







Origin	Guangzhou, P. R. China	**Trademark**	**VANGAA**
Mode No.	VG-LM361A	**Ref. code**	
TRADE TERMS			
Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	2piece
Unit price	36x1W US$: 36x3W US$:		

DESCRIPTION

This is a new style LED Moving Head Wash Light, it's very useful for the stage color wash use.

Features

12 channels DMX-512 LED Moving yoke;
Pan: 540 °, 8/16bit, adjustable, electronic correction;
Tilt: 270 °, 8/16bit, adjustable, electronic correction;
7+white+rainbow effect;0~10/s strobe, adjustable;
0~100% linear dimming; Special function: Built-in procedures for a variety of lighting effects, can run simultaneously from sound control without controllers;
Optical system: Combination of high-precision quartz lens, so that optical loss is reduced to a minimum;

Protection: all intelligent temperature thermal protection and high-interference with electronic circuits.

Specifications

Input voltage: AC90~260V, 50-60 Hz
Power consumption: 150W
Light Source: 36pcs 1W/3W high brightness LEDs
Pan: 540° , Tilt: 270°
Maximum ambient temperature: 104F(40℃)
Data input: locking 3-pinXLR male socket
Data output: locking 3-pinXLR female socket
Data pin configuration: pin 1 shield, pin2(-), pin 3(+)
Protocols: DMX-512USITT
DMX channels: 12CH


PACKAGE


Package	carton	**Pcs/ctn**	1Pcs/ctn
Ctn size	280*280*370mm	**N.W/G.W**	7kg/9kg

BACK TOP

LED EFFECT LIGHT SERIES

LED PAR 64 Light (177PCS)

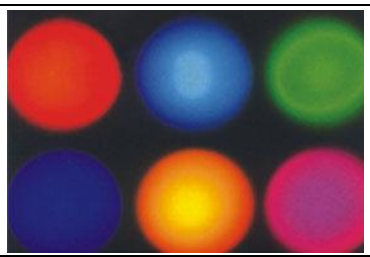Origin	Guangzhou, P. R. China	**Trademark**	**VANGAA**
Mode No.	VG-LP177	**Ref. code**	
TRADE TERMS			
Payment term	T/T, Paypal	**H.S. Code**	9405409000

Price term	Ex-work	**MQO**	4piece
Unit price	US$:		
DESCRIPTION			
Features Dimmer & Strobe: Electronic dimmer for light output adjustment from 0 to 100% (No color variation). High speed white or full color strobe, flash rate 1~25fps Control protocol: DMX512 Control channels: 7CH Control options: DMX, Auto-trigger		Operation modes: Master & Slave, Stand alone, Sound **Specifications** Input voltage: AC110/240V, 50/60Hz Lamp: Intensive brightness LEDs, LP-1077, Φ 10 LED(R:59 G:59 B:59), 60-100 thousand hrs Rated Life Beam angle: 15 ~35 °beam angle of each LED	
PACKAGE			
Package	carton	**Pcs/ctn**	1Pcs/ctn
Ctn size	290*290*370mm	**N.W/G.W**	3.5kg/4kg

LED Moonflower Light(48pcs LEDs)







Origin	Guangzhou, P. R. China	**Trademark**	**VANGAA**
Mode No.	VG-LE48	**Ref. code**	
TRADE TERMS			
Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	8piece
Unit price	US$:		
DESCRIPTION			
Features Creates 16 various RGB patterns (gobos) via LED matrix; Gobo rotation; Strobe effect with adjustable speed; Equipped with 40 LEDs: 24 x red, 12 x blue, 12 x green; 100 000 hours LED life; Manual focus; Fuzzy-Sound-Control: program continues automatically during periods without music or bass-beat; DMX-controlled operation or stand alone operation with Master/Slave-function (up to 4 slaves); Blackout, Gobos and Auto/Manual Mode applicable in		Stand Alone. **Specifications** Input power: AC90~240V, 50/60Hz LEDs: 48pcs 5mm high brightness LEDs, (R:24, G:12, B:12) Lamp life:6-10 million hours Beam Angle: 15 ° Control mode: DMX-512; Auto-run; Sound activate; Master/Slave (up to 4 slaves) DMX channels: 6CH Display: Control-Board with 4-digit display	
PACKAGE			
Package	carton	**Pcs/ctn**	4Pcs/ctn
Ctn size	290*290*210mm	**N.W/G.W**	8kg/10kg

LED Moonflower Light(162pcs LEDs)







Origin	Guangzhou, P. R. China	**Trademark**	**VANGAA**
Mode No.	VG-LE162	**Ref. code**	
TRADE TERMS			
Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	8piece
Unit price	US$:		

DESCRIPTION

Features

162pcs LEDs, Red, Green, Blue 3 colors change, 6 DMX Channels, 7 Gobo teams Dynamic change, Zoom out or Zoom in for each team is available.

Specifications

Input power: AC90~240V, 50/60Hz


Power consumption: 20W
LEDs: 162pcs ¢5 LEDs, (R:60; G:66; B:36)
DMX Channels: 6CH
Operation mode: DMX-512; Master/Slave; Sound Activate; Auto Trigger

PACKAGE

Package	carton	**Pcs/ctn**	4Pcs/ctn
Ctn size	630*350*605mm	**N.W/G.W**	22kg/26kg

LED Moonflower Light(469pcs LEDs)



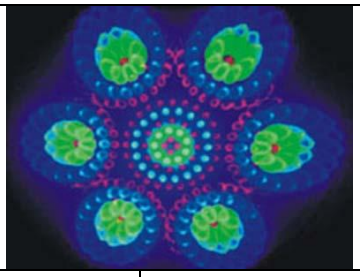


Origin	Guangzhou, P. R. China	**Trademark**	**VANGAA**
Mode No.	VG-LE469	**Ref. code**	
TRADE TERMS			
Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	8piece
Unit price	US$:		

DESCRIPTION

Features:

469pcs LEDs, Red, Green, Blue 3 colors change, 6 DMX

LEDs: 469pcs ¢5 LEDs, (R:280; G:63; B:126)
DMX Channels: 6CH

Channels, 7 Gobo teams Dynamic change, Zoom out or Zoom in for each team is available. **Specifications** Input power: AC90~240V, 50/60Hz Power consumption: 60W	Operation mode: DMX-512; Master/Slave; Sound Activate; Auto Trigger Inner carton size: 350*340*350 mm (1pcs/carton) N.W/G.W: 5kg/5.5kg

PACKAGE

Package	carton	**Pcs/ctn**	2Pcs/ctn
Ctn size	690*370*360mm	**N.W/G.W**	10kg/12kg

LED Four Heads Effect Light







Origin	Guangzhou, P. R. China	**Trademark**	**VANGAA**
Mode No.	VG-LE2241	**Ref. code**	

TRADE TERMS

Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	4piece
Unit price	US$:		

DESCRIPTION

Features 4-head LED Moonflower effect with sharp Red, Green, Blue and White high output color beams Output similar to quad 250W Halogen lamps (based on visual side-by-side comparison with halogen fixture) DMX-512 protocol 4 or 7 DMX Channel modes 3 operational modes: Sound active with built-in programs; DMX Controller Electronic dimming: 0 - 100% Extreme long lifetime of the LEDs (100,000 hr. rating)	Includes hanging bracket Multi-voltage switch (120V or 230V) **Specifications** Input power: AC110V/220V, 50/60Hz Power consumption: 20W LEDs: 224pcs LEDs, (R:80; G:60; B:48; White:36) Control mode: auto-run mode; DMX-512 control mode; master/slave mode; sound active DMX channels: 4/7CH Effect: strobe, color change, auto running color change Package: carton box

PACKAGE


Package	carton	**Pcs/ctn**	1Pcs/ctn
Ctn size	493*290*123mm	**N.W/G.W**	4.5kg/5kg

Six Eyes LED Effect Light



Origin	Guangzhou, P. R. China	**Trademark**	**VANGAA**
Mode No.	VG-LE2242	**Ref. code**	
TRADE TERMS			
Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	4piece
Unit price	US$:		
DESCRIPTION			
Specifications Input power: AC110~220V, 50/60Hz Power consumption: 25W LEDs: 224pcs ¢5 LEDs, (R:88; G:48; B: 88)		Control signal: DMX-512 DMX channels: 4CH Control mode: auto-run; DMX-512; sound active; master/slave mode; strobe function	
PACKAGE			
Package	carton	**Pcs/ctn**	1Pcs/ctn
Ctn size	305*305*397mm	**N.W/G.W**	3.8kg/4.2kg


LED Six Angles Effect Light

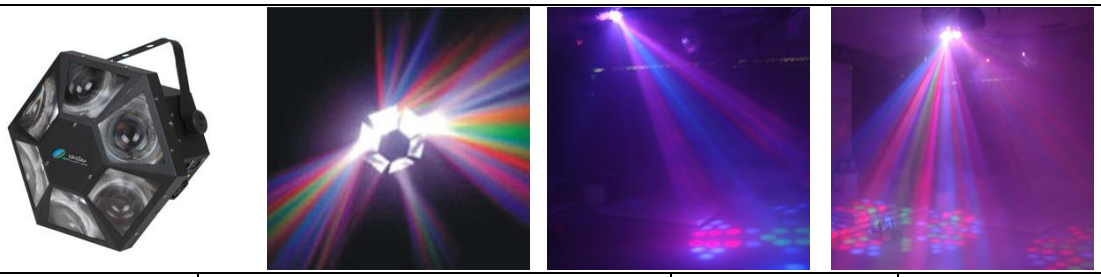

Origin	Guangzhou, P. R. China	**Trademark**	**VANGAA**
Mode No.	VG-LE252	**Ref. code**	
TRADE TERMS			
Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	4piece
Unit price	US$:		
DESCRIPTION			
Specifications Input power: AC110~220V, 50/60Hz Power consumption: 35W LEDs: 252pcs ¢5 LED,(R:108; G:72; B:72), RGB three color changes		Control signal: DMX-512 DMX channels: 8CH Control mode: auto-run; sound active; master/slave mode, 16 different patterns can be exchanged, and the speed adjustable	
PACKAGE			
Package	carton	**Pcs/ctn**	1Pcs/ctn
Ctn size	315*315*236mm	**N.W/G.W**	3.5kg/4kg

LED Three Claws Effect Light






Origin	Guangzhou, P. R. China	**Trademark**	**VANGAA**
Mode No.	VG-LE725	**Ref. code**	
TRADE TERMS			
Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	4piece
Unit price	US$:		
DESCRIPTION			

Specifications

Input power: AC110~220V, 50/60Hz

Power consumption: 50W

LEDs: 72pcs ¢5 LEDs, (R:24; G:24; B:24)

Beam angle: 15° /25°



Control mode: DMX-512; auto-run; master/slave mode; sound active

DMX channels: 11CH

Effect: strobe, color change, auto running color change

PACKAGE			
Package	carton	**Pcs/ctn**	1Pcs/ctn
Ctn size	327*327*165mm	**N.W/G.W**	3.8kg/4.2kg

LED Star Ball

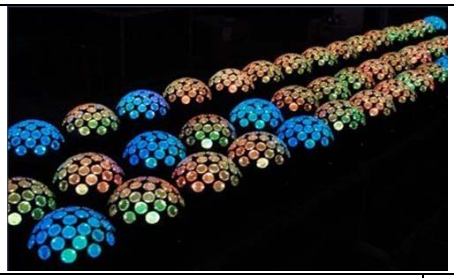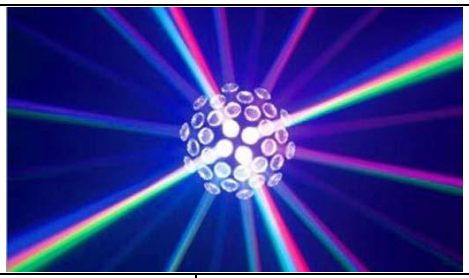Origin	Guangzhou, P. R. China	**Trademark**	**VANGAA**
Mode No.	VG-LE109	**Ref. code**	
TRADE TERMS			
Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	4piece
Unit price	US$:		
DESCRIPTION			

Features

Combining the Features of the LED Energy-Saving and environment-protective, using High Efficiency Constant

4 operational modes: Master/slave and sound active mode (8 built-in programs).

Specifications

Current & new heat dissipation technology, use 3 pieces 3 watt 3-in-1 RGB LEDs, make the stage effect more magic and wonderful. It is applying for the Big Show, Stage, etc. 3 DMX channels: Dimmer/Strobe; Rotation: Clockwise & Counter Clockwise plus rotation speed;	Input power: AC110~220V, 50/60Hz Power consumption: 25W LEDs: 9W RGB 3-in-1 Long Life LEDs DMX channels: 3 CH

PACKAGE

Package	carton	**Pcs/ctn**	1Pcs/ctn
Ctn size	210*210*179mm	**N.W/G.W**	1.8kg/2.5kg

LED LOGO Light







Origin	Guangzhou, P. R. China	**Trademark**	**VANGAA**
Mode No.	VG-LG024	**Ref. code**	

TRADE TERMS

Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	2piece
Unit price	US$:		


DESCRIPTION

Features Small power LED Logo Light, give you the best advertising effect for your own company logo. You can use it in your shop, fair booth and other places where you like You can design the pattern what you like, the pattern can rotating and have six colors change. It's can be used for the party, wedding and other ceremony time The gobo in the light is very easy to put out or change. You can open the back door to change the gobo. You can customize the gobos what you like from us anytime	The lens is the screw one. You can spin the lens and let the pattern clearer. **Specifications** Input power: AC110/220V, 50/60Hz Power consumption: 30W LEDs:1pcs 24W WHITE LED Colors: R, G, B, Y Working position: Any safe, secure position Warranty: 1 year

PACKAGE

Package	carton	**Pcs/ctn**	1Pcs/ctn
Ctn size	340*260*220mm	**N.W/G.W**	3.5kg/4kg

LED Butterfly



Origin	Guangzhou, P. R. China	**Trademark**	**VANGAA**
Mode No.	VG-LE031	**Ref. code**	
TRADE TERMS			
Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	4piece
Unit price	US$:		

DESCRIPTION

Features

RGB colors make good light effect;
3 PCS 1W RGB LEDs;
Color change and strobe adjustable;
With built-in programs;
Sound active;
Control panel with digital display.


Specifications


Input power: 90~240V, 50/60Hz
Power consumption: 10W
LEDs: 3pcs 1W RGB LEDs, (R:1; G:1; B:1)
Control signal: DMX-512 Control channels: 6CH
Control mode: auto-run; DMX-512; Sound active; master/slave control

PACKAGE

Package	carton	**Pcs/ctn**	6Pcs/ctn
Ctn size	580*385*655mm	**N.W/G.W**	16kg/18.5kg

LED Double Derby



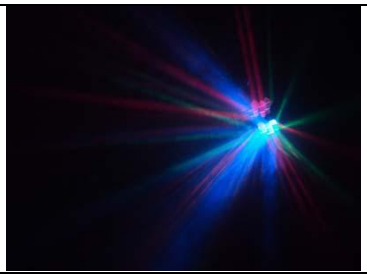Origin	Guangzhou, P. R. China	**Trademark**	**VANGAA**
Mode No.	VG-LE033	**Ref. code**	
TRADE TERMS			
Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	4piece
Unit price	US$:		

DESCRIPTION

Features

RGB colors make good light effect;
3 PCS 3W RGB LEDs;
Color change and strobe adjustable;
With built-in programs;

Input power: AC90~240V, 50/60Hz
Power consumption: 10W
LEDs: 3pcs 3W RGB LEDs, (R:1; G:1; B:1)
Control signal: DMX-512
Control channels: 6CH

Sound active; Control panel with digital display. **Specifications**		Control mode: auto-run; DMX-512; Sound active; master/slave control	
PACKAGE			
Package	carton	**Pcs/ctn**	6Pcs/ctn
Ctn size	640*435*640mm	**N.W/G.W**	15kg/17.5kg

LED Signal Strobe Light



Origin	Guangzhou, P. R. China	**Trademark**	**VANGAA**
Mode No.	VG-LE260	**Ref. code**	
TRADE TERMS			
Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	20piece
Unit price	US$:		
DESCRIPTION			
Specifications Input power: AC110V/220V, 50/60Hz Power consumption: 40W Fuse: T1A LEDs: 260pcs 10mm LEDs, (R:86; G:87; B:87) Beam angel: 25° /35°		Colors: RGB colors mixing to thousands of hundreds colors Control mode: Auto-run; Sound active; Master/Slave; DMX-512 LCD Control panel DMX channels: 6CH	
PACKAGE			
Package	carton	**Pcs/ctn**	1Pcs/ctn
Ctn size	480*440*195mm	**N.W/G.W**	3.3kg/4kg

LED Strobe Light



Origin	Guangzhou, P. R. China	**Trademark**	**VANGAA**
Mode No.	VG-LE630	**Ref. code**	
TRADE TERMS			

Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	20piece
Unit price	US$:		

DESCRIPTION

Features

Dimmer: Electronic dimmer for light output adjustment from 0~100% (No color variation);

Strobe: High speed white or full color strobe, flash rate 1-25fps.

Specifications

Input power: AC90~240V, 50/60Hz

Light sources: 630pcs Φ5 intensive brightness LEDs, (R: 210, G: 210, B: 210), 60~100 thousand hrs Rated Life

Beam angle: 15 ~35 °beam angle of each LED

Control Protocol: Usitt DMX512

DMX channels: 7CH

Control options: DMX, Auto-trigger

Operation modes: Master/Slave, Stand alone, Sound active

Mechanical Specification: 37*36*20cm


Net Weight: 4kg

PACKAGE

Package	carton	**Pcs/ctn**	4Pcs/ctn
Ctn size	530*370*510mm	**N.W/G.W**	16kg/20kg

LED Small Spot Light

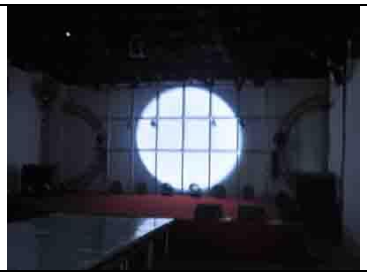

Origin	Guangzhou, P. R. China	**Trademark**	**VANGAA**
Mode No.	VG-SP1-3W	**Ref. code**	

TRADE TERMS

Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	40piece
Unit price	US$:		

DESCRIPTION

This product is a LED technology innovation product, through the continuous improvement, with a brand-new face shining to you. It has crashed, wear-resisting of resistance metal case, more durability than other common spot lamp in the market. At the same time, it has high light transmittance lenses, seismic resistance, and high temperature resistant features. With the high quality import EDISON LED lamp, its luminous rate is high, long service life. It can shooting out a strong light beam, other internal material all adopts the high quality material qualitative to make.

Features

The similar products all don't have the DMX-512 signal control in the market, but this has the function;

Strong durability, with the features of low quantity of heat and low power consumption;

Suitable for ballroom, discos, stage, room, HI room, bars, KTV, family and birthday party.

Specifications

Input power: AC90~250V, 50/60Hz

Light sources: high brightness LED, 1pcs 3W White color LED

Lifespan: 50,000~100,000 hours

Dimmer/strobe: 0~100% electronic dimmer, white color strobe 1~13Hz/s

Control signal: DMX512

DMX channel: 2CH

Lifespan can reach to 100,000 hours; Using real green energy conservation of the health and safety LED light source; High brightness, shooting out wonderful light beam;	Control mode: DMX-512, auto trigger Run mode: Master-slave control mode, auto-run, sound active Data input/output: 3 pin XLR socket Working temperature: -10℃~35℃

PACKAGE

Package	carton	**Pcs/ctn**	1Pcs/ctn
Ctn size	mm	**N.W/G.W**	kg/kg

BACK TOP

MOVING HEAD LIGHT SERIES

330W Moving Head Zoom Beam Light



Origin	Guangzhou, P. R. China	**Trademark**	**VanGaa**
Mode No.	VG-MH330A	**Ref. code**	

TRADE TERMS

Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	2 piece
Unit price	**US$:**		

DESCRIPTION

This new style 330W intelligent moving head zoom beam light has novel design and compact structure can be as a very professional moving head light. It has small beam angle, bean angle scale freely, has multistage beam angle change effect. It has high brightness, downy lighting, and professional linear focus to meet the high quality lighting needs. This type moving head light can be widely used in professional stage performances, studio, TV station, the theatre and other entertainment places. **Features** New style intelligent moving head light, beam lighting with zoom function; Double prism effect, beam angle adjustable; 0~2.3degree beam, close to the parallel light, electronic linear focus, multistage beam angle change effect; 14 kinds color and white light, 8 rotating gobo wheel; With soft light angle adjustable function; Built-in long life battery which can be automatically	Prism: 2 two-way rotary prism wheel, beam angle scale freely; Lens: High precision group bonding optical lens Soft light: adjustable soft light angle Beam: multistage beam angle change effect Focus: linear focus Dimmer: 0%~100% linear dimmer Pan: 540 degree, correction positioning automatically Tilt: 239 degree, correction positioning automatically Scan speed: Pan 3.0second/540degree, tilt 2.0 second/250degree Beam angle: parallel beam angle 0~2.3 degree Atomizing light angle: 8 degree Strobe: double strobe structure, 0.5~14 time/second adjustable Quantity of motors: 14pcs super mute motor, including 2pcs 3-phase motors, 16bit drive Control mode: international standard DMX-512

charging, don't need connect the power to set the address ID; Wireless DMX 512 receiving modules are optional. **Specifications** Input power: AC110V~240V, 50~60Hz Power consumption: 330W Light sources: OSRAM Sirius series HRI 330W lamp Ballast: electronic ballast Color temperature: 7500K Luminous: 186700Lux(20m)； 48175Lux(40m)；20855Lux(60m) Lifespan of lamp: 1500h Color wheel: 14 colors + white Gobo wheel: 8 rotation gobos + 4 white iris	ID address setting: Built-in long life battery which can be automatically charging, don't need connect the power to set the address ID; DMX channels: 20CH(16bit), double channel receive mode design Other functions: remote control lamp switch, fan speed control automatically, the lamp reduce 60watt when the lamp closed light automatically; Appearance: high temperature resistant plastic shell, high strength alloy cold press molding kernel material; IP rating: IP20 Body size: 380*367*522mm Color: black

PACKAGE

Package	carton	**Pcs/ctn**	1pc/ctn
Ctn size	400*380*535mm	**N.W/G.W**	19kg/22kg

5R 200W Beam Sharpy






Origin	Guangzhou, P. R. China	**Trademark**	**VanGaa**
Mode No.	VG-MH200A	**Ref. code**	

TRADE TERMS

Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	1 piece
Unit price	**US$:**		

DESCRIPTION

Features The light using imported color chip and heat filter, the color temperature will more uniform and unification, it will ensure the light can putouts more colorful, more beautiful and more brightness; The light uses Taiwan YODN R5 200W lamp default, the OSRAM SIRIUS HRI 180W lamp is optional; We insist develop PCB by ourselves. All dip-in chips and electronic components have been changed into surface mount type to make sure the XY drive and module drivers separately, which make the circuit boards are more stable	Gobo wheel: 1 gobo wheel, with 17 fixed gobos+ white, clockwise and counterclockwise two ways rotating Prism: rotating eight prism, clockwise and counterclockwise two ways rotating, moving effect, atomization function Lens: 3pcs high quality slices lens type lens groups Atomization effect: 0~100% adjustable atomization flare angle Aperture: seventh beam regulation adjust Focus: linear focus Dimmer/strobe: 0~100% linear dimmer and double


and reliable. **Specifications** Input voltage: AC110~240V±10V, 50/60Hz Power: 200W Light source: YODN MSD200 R5, (OSRAM SIRIUS HRI 180W optional) Color temperature: 8000K, luminous flux: 7950lm(6meters), intensity of illumination: 58760lx(20meters) Ballast: electronic ballast Lifespan: 2000hrs Color wheel: 14 colors+ white, clockwise and counterclockwise two ways rotating	stroboscopic, speed(0.5~14 seconds) Pan: 540degree, resolution 8bit/16bit, automatic adjust Tilt: 250degree, resolution 8bit/16bit, automatic adjust Beam angle: parallel beam angle 0~3.8degree Control mode: international standard DMX512 DMX channel: 16CH Other functions: when mechanical closed light, the source power halve automatically IP rating: IP20 Outline dimension: 345mm(arms width)*475mm(total height)*405(base width)mm N.W: 16kg


PACKAGE

Package	carton	**Pcs/ctn**	1pc/ctn
Ctn size	450*400*505mm	**N.W/G.W**	16kg/19kg

1200W Moving Head Light







Origin	Guangzhou, P. R. China	**Trademark**	**VANGAA**
Mode No.	VG-MH1200A	**Ref. code**	

TRADE TERMS

Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	1piece
Unit price	US$:		

DESCRIPTION

Features 8 main colors adding 8 mixed colors, achieving high speed single way rainbow and scrolling effect; Mechanical linear DIMMER and 1---10 times/s high speed strobe effect; Horizontal 540°and vertical 270°scanning range, smooth scanning action and accurate orientation; Precise adjustment on horizontal and vertical position; Precise speed adjustment on horizontal and vertical position; Stopper function on the rotating effect wheel and position moving 5 rotating elegant GOBO(3 stainless rotating	Automatic focusing function; Double manifier, color temperature effect; Fog manufying Prism, comet lens, repeated pattern prism effect, prism automatic rotating effect; 3 primary color effect(C,M,Y,K); 3 primary speed adjustment; Built-in over heat protection and high voltage protection; Compatible with DMX 512 international digital single; According to various kings of satety standards, IP 20 protect grades, the cable based on the CE20/22 standard. **Specifications** Input power: AC90~240V, 50/60Hz

GOBO+1 glass+1 white); Pattern internal light rotating function, freely adjusting fast, low speed, clockwise and anticlockwise; GOBO position adjustment;	Power consumption: 1500W Light sources: HMI1200W Control signal: DMX512 Control channel: 20CH


PACKAGE


Package	carton	**Pcs/ctn**	1Pcs/ctn
Ctn size	630*585*890mm	**N.W/G.W**	50kg/56kg

1200W Moving Head Light









Origin	Guangzhou, P. R. China	**Trademark**	**VANGAA**
Mode No.	VG-MH1200B	**Ref. code**	

TRADE TERMS

Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	1piece
Unit price	US$:		

DESCRIPTION


Features 8 main colors adding 8 mixed colors, achieving high speed single way rainbow and scrolling effect; Mechanical linear DIMMER and 1---10 times/s high speed strobe effect; Horizontal 540 °and vertical 270 °scanning range, smooth scanning action and accurate orientation; Precise adjustment on horizontal and vertical position; Precise speed adjustment on horizontal and vertical position; Stopper function on the rotating effect wheel and position moving; 5 rotating elegant GOBO(3 stainless rotating GOBO+1 glass+1 white); Pattern internal light rotating function, freely adjusting fast, low speed, clockwise and anticlockwise; GOBO position adjustment;	Automatic focusing function; Double magnifying glass, penta prism, comet lens, repeated pattern prism effect, prism automatic rotating effect; 3 primary color effect(C,M,Y,K); 3 primary speed adjustment; Built-in over heat protection and high voltage protection; Compatible with DMX 512 international digital single; According to various kinds of safety standards, IP 20 protect grades, the cable accords to the CE20/22 standard. **Specifications** Input power: AC110~240V, 50/60Hz Power consumption: 1600W Light sources: MSI 1200W IP rating: IP 20 Control: DMX-512 DMX Channels: 24CH


PACKAGE

Package	carton	**Pcs/ctn**	1Pcs/ctn
Ctn size	630*585*890mm	**N.W/G.W**	52kg/59kg

1200W Moving Head Light







Origin	Guangzhou, P. R. China	**Trademark**	**VANGAA**
Mode No.	VG-MH1200C	**Ref. code**	
TRADE TERMS			
Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	1piece
Unit price	16CH US$: 19CH US$:		

DESCRIPTION

Features

7 main color + achieving high speed rainbow effect, double high speed rotation;

0-100% Mechanical linear Dimmer;

1-10 times/s high speed STROBE effect;

Horizontal 450 °and vertical 270 °scanning range, smooth scanning action and accurate orientation;

One high precision density step motor in pan and tilt;

Precise speed adjustment on horizontal and vertical position;

Vector when effect wheel running and position removing 6 elegant gobo, every Gobo is easy to replace;

Pattern internal light rotating function, freely adjusting fast, low speed, clockwise and anticlockwise;

Adopt nonplus zoom change focus function between 15 °-35 °, and random adjusted;

3-facet prism, prism rotating clockwise and anticlockwise

6 convection cooling-fans, optimize circuit design inside, heated elimination rapidly;

LCD, English and Chinese aptitude operating shortcuts information interface;

Built-in over heat protecting and high voltage protection;

Compatible with DMX 512 international digital signal;

According to various kinds of safety standards, IP20 protect grades. The cable accords to the CE20/22 standard.

Specifications

Input power: AC110~240V, 50/60Hz

Power consumption: 1500W

Light sources: HMI 1200W

Control Signal: DMX-512


DMX channels: 16CH


PACKAGE

Package	carton	**Pcs/ctn**	1Pcs/ctn
Ctn size	630*585*890mm	**N.W/G.W**	50kg/57kg

1200W Moving Head Light







Origin	Guangzhou, P. R. China	**Trademark**	**VANGAA**

Mode No.	VG-MH1200D	**Ref. code**	
TRADE TERMS			
Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	1piece
Unit price	US$:		
DESCRIPTION			

Features

6 color + open ; Color temperature filter;
3 primary color effect(C,M,Y);
3 Primary speed adjustment;
0-100% Mechanical linear Dimmer;
1-10 times high speed STROBE effect;
LCD, Operating shortcuts, convenience;
Horizontal 450 ° and vertical 270 ° scanning range, smooth scanning action and accurate orientation;
1-motor motivated on both pan and tilt movement;
Several convection fans refrigeration, optimize circuit design inside, heat elimination rapidly;
Built-in over heat protecting and high voltage protection;
Compatible with DMX 512 international digital signal;
PFC Power factor compensate;
According to various kinds of safety standards;
The cable accords to the CE20/22 standard.


Specifications


Input power: AC110~240V, 50/60Hz
Power consumption: 1500W
Light sources: HMI 1200W
IP rating: IP 20
Control signal: DMX-512
DMX channels: 16CH/12CH
Control mode: Auto-run, DMX512, Master and slave, sound active
Body size: L445*W400×*H715 mm

PACKAGE			
Package	carton	**Pcs/ctn**	1Pcs/ctn
Ctn size	450*410*720mm	**N.W/G.W**	48kg/55kg

575W Moving Head Light



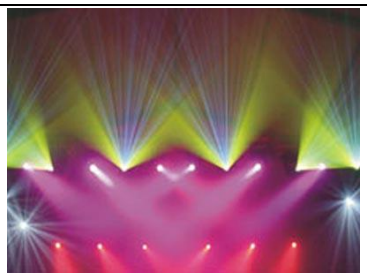





Origin	Guangzhou, P. R. China	**Trademark**	**VANGAA**
Mode No.	VG-MH575A	**Ref. code**	
TRADE TERMS			
Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	1piece
Unit price	US$:		
DESCRIPTION			

Features

8 main colors adding 8 mixed colors, achieving high speed single way rainbow and scrolling effect;
GOBO position adjustment;
Automatic focusing function;
Double magnifier, color temperature effect;


Mechanical linear DIMMER and 1-10 times/s high speed STROBE effect Horizontal 540 °and vertical 270 °scanning range, smooth scanning action and accurate orientation; Precise adjustment on horizontal and vertical position; Precise speed adjustment on horizontal and vertical position; Stopper function on the rotating effect wheel and position moving; 5 fixing elegant GOBO (4 fixing GOBO+1 glass+1white); 5 rotating elegant GOBO (3 stainless rotating GOBO +1 glass+1white); Pattern internal light rotating function, freely adjusting fast, low speed, clockwise and anticlockwise;	4 convection cooling-fan, optimize internal air duct way, heat elimination rapidly; Built-in over heat protection and high voltage protection; Compatible with DMX 512 international digital signal; According to various kinds of safety standards, IP20 protect grades. The cable accords to the CE20/22 standard. **Specifications** Input power: AC110~240V, 50/60Hz Power consumption: 680W Light sources: HMI 575W Control Signal: DMX-512 Channels: 16CH IP rating: IP20


PACKAGE

Package	carton	**Pcs/ctn**	1Pcs/ctn
Ctn size	520*440*780mm	**N.W/G.W**	41kg/45kg

575W Moving Head Light



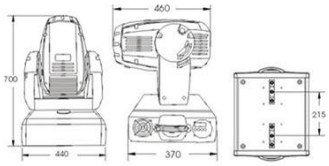



Origin	Guangzhou, P. R. China	**Trademark**	**VANGAA**
Mode No.	VG-MH575B	**Ref. code**	

TRADE TERMS

Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	1piece
Unit price	US$:		


DESCRIPTION

Features 8 main colors adding 8 mixed colors, achieving high speed single way rainbow and scrolling effect; Mechanical linear DIMMER and 1-10 times/s high speed STROBE effect; Horizontal 540 °and vertical 270 °scanning range, smooth scanning action and accurate orientation; Precise adjustment on horizontal and vertical position stopper function on the effect wheel rotating and position moving; Electronic linear infinite adjustment;	3 primary speed adjustment; 4convection cooling-fan, optimize internal air duct way, heat elimination rapidly; Built-in over heat protection and high voltage protection; Compatible with DMX 512 international digital signal; According to various kinds of safety standards, IP20 protect grades, The cable accords to the CE20/22 standard. **Specifications** Input power: AC110~249V, 50/60Hz Power consumption: 680W Light sources: HMI 575W

Up, down color temperature, orange, atomizing effect; 3 primary color effect(C.M.Y.K);		Control signal: DMX-512 Channels: 16CH	
PACKAGE			
Package	carton	**Pcs/ctn**	1Pcs/ctn
Ctn size	520*440*780mm	**N.W/G.W**	40kg/44kg

575W Moving Head Light







Origin	Guangzhou, P. R. China	**Trademark**	**VANGAA**
Mode No.	VG-MH575C	**Ref. code**	
TRADE TERMS			
Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	1piece
Unit price	US$:		
DESCRIPTION			

Features

Color: 7 colors+ white, with rainbow effect;
Prism: 1 rotate table 3-facet prism;
Dimmer/ Flash: Double patches dimming, flash 1-10 / s, speed adjustable;
Overheat Protection: 100℃ overheat protection thermostat;
Focus/ Zoom Out: Linear focus, gobo zoom out and zoom in is available;
Iris: 1 adjustable Iris;
Fine: Pan & Tilt Fine 1.8° ;
Photoelectric reset: Pan & Tilt use the photoelectric reset device, both with automatic rectify function;
Horizontal rotation angle: maximum 450 °;
Vertical rotation angle: maximum 270 °;
Speed Adjustment: Pan & Tilt speed adjustable from 0-255;
Use the full LCD screen to display MENU.


Specifications


Input power: AC110~240V, 50/60Hz
Power consumption:680W
Light sources: NSP 575W
Control signal: DMX-512
Channels: 16CH

PACKAGE			
Package	carton	**Pcs/ctn**	1Pcs/ctn
Ctn size	560*560*690mm	**N.W/G.W**	39kg/43kg

575W Moving Head Light







Origin	Guangzhou, P. R. China	**Trademark**	**VANGAA**
Mode No.	VG-MH575D	**Ref. code**	
TRADE TERMS			
Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	1piece
Unit price	US$:		

DESCRIPTION

This product is suitable for various entertainment and recreation place, such as secondary stage, theatre, TV showroom, multimedia hall, show square, organ hall, recreational city, disco club, bar, KTV, home party etc.

Features

Color Wheel: White+5colors+heating up + cooling down, with rainbow effect;
CMY Color: CMY3 basic colors and mixes colorful effect;
Flash: 1-7/s, speed adjustable;
Protection: 100℃ overheat protection;
Fine: Pan & Tilt fine 1.8°;
Reset: Pan & Tilt use photoelectric reset device, both with automatic rectify function;
Horizontal rotation angle maximum 450°;
Vertical rotation angle maximum 270°;



Specifications


Input power: AC110~240V, 50/60Hz
Power consumption: 800W
Light sources: MSD575W
Fuse: 10A
Base: GX9.5
Color TE: 6000K
DMX channel: 16CH
Channel Function:
CH1: Lamp on/off CH2: Strobe CH3: Color wheel
CH4: Atomization CH5: Pan CH6: Tilt
CH7: Pan fine CH8: Tile fine CH9: X/Y speed
CH10: Electronic focus
CH11: C CH12: M CH13: Y
CH14: C/M/Y speed(fast to slow)
CH15: C/M/Y speed(slow to fast)
CH16: Reset
Finished size: 520*400*690mm

PACKAGE

Package	carton	**Pcs/ctn**	1Pcs/ctn
Ctn size	mm	**N.W/G.W**	kg/kg

575W Moving Head Light

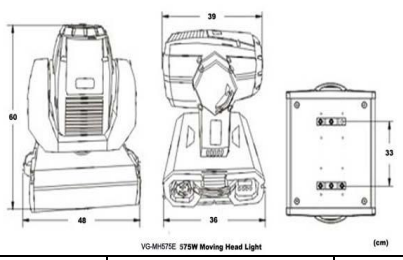

Origin	Guangzhou, P. R. China	**Trademark**	**VANGAA**
Mode No.	VG-MH575E	**Ref. code**	

TRADE TERMS			
Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	1piece
Unit price	US$:		

DESCRIPTION

Features

8 colors, achieving high speed double way rainbow and scrolling effect pattern internal light rotating function, freely adjusting;

Fast, low speed, clockwise and anticlockwise BL25088 kinds of changeable patterns(including one glass pattern and 6 metal barrens and 1 white light);

Mechanical light adjustment and 1-10 times/s strobe effect;

Horizontal direction 450° scanning, smooth scanning action and accurate;

orientation Vertion270° scanning, smooth scanning action and accurate orient station 3Prism effect, prism rotating;

Automatic focusing function;

DMX512international digit display;

Compatible with DMX512internatrinal digital signal 4convection cooling fan, optimize internal air duct way, heat elimination rapidly;

Accord to variety standard, IP20, power line accord to CE 20/22.

Specifications

Input power: AC110~240V, 50/60Hz

Power consumption: 680W

Light sources: HMI575W


Control signal: DMX-512

Channels: 10CH

PACKAGE			
Package	carton	**Pcs/ctn**	1Pcs/ctn
Ctn size	500*470*565mm	**N.W/G.W**	32kg/35kg

700W Beam Light






Origin	Guangzhou, P. R. China	**Trademark**	**VANGAA**
Mode No.	VG-MH700	**Ref. code**	

TRADE TERMS			
Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	1piece
Unit price	US$:		

DESCRIPTION

For the traditional stage performance need, we developed this new kind 700W beam light. It can shot out very great and brightness light beam. With the stage music voice and animation effect, it can reach very shock and brilliant stage effect. Sound active control let the beam dance with the music. DMX-512 international signal control let you can edit the stage performance program by your ideal.

With gobo shaking and gobo change in any shapes function shutter: Variable from 1-10 flashes per second or random strobe;

Dimmer: 0% ~ 100% full range dimming;

Beautiful blue and white LCD display, Chinese/English LCD display;

Can complete change DMX address, light reset and sound

Feathers: Control channel modes: 14channels; Horizontal: 540 °; Vertical: 260 °; Color: 7 colors+ white, with rainbow effect; Fixed gobo wheels: 7 interchangeable and indexable gobos plus open;	mode functions on the controller. **Specifications** Input power: AC110~240V, 50/60Hz Power consumption: 850W Lamp: 700W lamp Control signal: DXM512 Control channel: 14CH

PACKAGE

Package	carton	**Pcs/ctn**	1Pcs/ctn
Ctn size	560 *560*690mm	**N.W/G.W**	32kg/35kg

300W Beam Light






Origin	Guangzhou, P. R. China	**Trademark**	**VANGAA**
Mode No.	VG-MH300	**Ref. code**	

TRADE TERMS

Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	1piece
Unit price	US$:		



DESCRIPTION


For the traditional stage performance need, we developed this new kind 300W beam light. It can shot out very great and brightness light beam. With the stage music voice and animation effect, it can reach very shock and brilliant stage effect. Sound active control let the beam dance with the music. DMX-512 international signal control will let you can edit the stage performance program by your ideal. 300W is only a little dim than the 700W Beam Light, other is the same with it. **Features** Control channel modes: 14 channels; Horizontal: 540 °; Vertical: 260 °; Color: 7 colors+ white， with rainbow effect; Fixed gobo wheels: 7 interchangeable, indexable gobos	plus open with gobo shaking and gobo change in any shapes function shutter: Variable from 1-10 flashes per second or random strobe; Dimmer: 0% ~ 100% full range dimming; Beautiful blue and white LCD display, Chinese /English LCD display; Can complete change DMX address, light reset and sound mode functions on the controller. **Specifications** Input power: AC110~220V, 50/60Hz Power consumption: 450W Light sources: NSD300W Control signal: DXM512 Control DMX channel: 14CH

PACKAGE

Package	carton	**Pcs/ctn**	1Pcs/ctn
Ctn size	520*440*748mm	**N.W/G.W**	26kg/29kg

250W Moving Head Light



Origin	Guangzhou, P. R. China	**Trademark**	**VANGAA**
Mode No.	VG-MH250A	**Ref. code**	
TRADE TERMS			
Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	1piece
Unit price	US$:		

DESCRIPTION

Features

8colors,achieving high speed double way rainbow and scrolling effect pattern internal light rotating function, freely adjusting fast, low speed, clockwise and anticlockwise BL25088kinds of changeable patterns (including one glass pattern and five metal barrens and 1 white light)

Mechanical light adjustment and 1-10 times/s strobe effect

Horizontal direction 450 °scanning, mooth scanning action and accurate orientation

Vertion270 °scanning, smooth scanning action and accurate orientation

3 Prism effect, prism rotating Automatic focusing function

DMX512international digit display

Compatible with DMX512internatrinal digital signal 4 convection cooling fan, optimize internal air duct way, heat elimination rapidly

Accord to variety standard, IP20, power line accord to CE 20/22

Specifications

Power: AC110~240V, 50/60Hz

Power consumption: 400W

Light sources: NSD250W

Control signal: DMX-512


DMX channels: 13CH

PACKAGE

Package	carton	**Pcs/ctn**	1Pcs/ctn
Ctn size	500*470*565mm	**N.W/G.W**	25kg/29kg

150W Moving Head Beam Light






Origin	Guangzhou, P. R. China	**Trademark**	**VANGAA**
Mode No.	VG-MH150	**Ref. code**	
TRADE TERMS			

Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	1piece
Unit price	US$:		

DESCRIPTION

Features Control channel modes: 12 channels Horizontal: 540 ° Vertical: 260 ° Color: 7 colors+ white, with rainbow effect. Fixed gobo wheels: 7 interchangeable, indexable gobos plus open, with gobo shaking and gobo change in any shapes function shutter: Variable from 1-10 flashes per second or random strobe Dimmer: 0% ~ 100% full range dimming	Beautiful blue and white LCD display, Chinese /English LCD display Can complete change DMX address, light reset and sound mode functions on the controller. **Specifications** Input power: AC110~220V, 50/60Hz Power consumption: 300W Light sources: NSD150W Control signal: DXM512 Control channel: 12CH


PACKAGE

Package	carton	**Pcs/ctn**	1Pcs/ctn
Ctn size	415*395*460mm	**N.W/G.W**	16kg/19kg

BACK TOP

TRADITIONAL STAGE LIGHT SERIES

5 Heads Matrix Stage Blinder Light

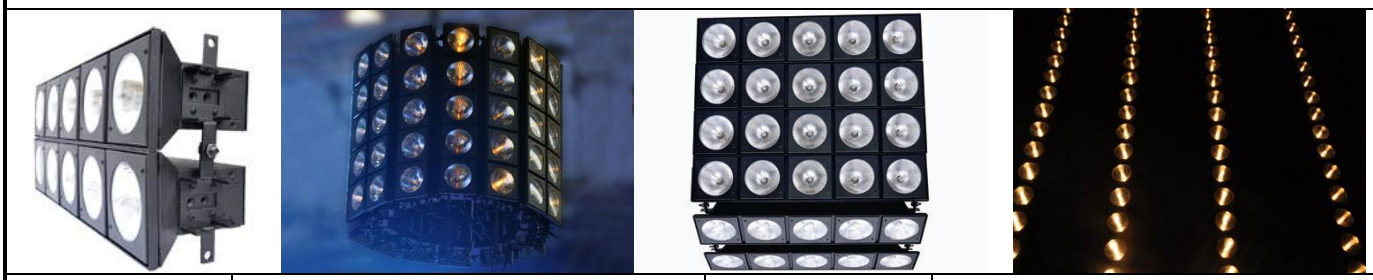

Origin	Guangzhou, P. R. China	**Trademark**	**VanGaa**
Mode No.	VG-MS005	**Ref. code**	

TRADE TERMS

Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	1 piece
Unit price	**US$:**		

DESCRIPTION


Design concept To meet the need of top-grade entertainment and bar for the continuous innovation, pursuit extraordinary shock result, we have combined foreign and China advanced technology for build the first product, and bringing this brand-new visual experience to you. We have learned from the current domestic and foreign products comprehensive advantages for this product design. It has good advanced, practical, high stability, good compatibility and	joined together arbitrary. It's can show digital, letter, to run the light, dimmer, video conversion and other programs, and it also can edit effect according to your own ideas. We can control every alone bulb to shaping the different effect. We often use the change color light to flash out on it to make multicolored effect, bring the new stage effect shock to you. It's your best choice to pursuit extraordinary and leading the trend of the stage, five to ten years to keep the leading of stage lighting industry and never eliminated.

expansibility and other characteristics. Our company for the product development and design is very seriously, after careful thinking elaborate of design, produce this rigorous scientific perfect product. The related materials of this light are all choose the stable and reliable international famous brand equipment. It makes sure the whole of product performance index and ensures that the product of the stability and security, and the product with high science and technology leading and expansibility, reached the top class standard in China. **Features** This product belongs to new ideas, initiative in China, suitable for high grade, high bar and other performing arts stage places. According to your will of the arbitrary put the position, modeling, and single, several pieces can be	**Specifications** Input voltage: AC110V~230V, 50Hz Power consumption: 380W Electric current: 15A Light sources: 5pcs PAR 30 lamps,75W Lifespan of the bulb: about 200hours Dimmer:0~100% DMX Channels: 3CH, 5CH and 8CH optional Control mode: DMX-512 mode, auto-run IP rating: IP20 Working temperature: -25℃~35℃ Fuse: 15A Lamp qty: 25pcs par30 Pixel: 11.5cm

PACKAGE

Package	carton	**Pcs/ctn**	1pc/ctn
Ctn size	mm	**N.W/G.W**	kg/kg

5x5 Matrix Stage Blinder Light

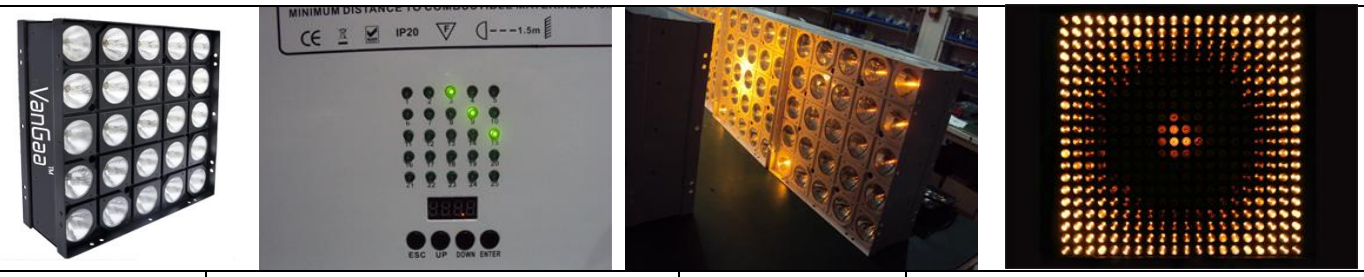

Origin	Guangzhou, P. R. China	**Trademark**	**VanGaa**
Mode No.	VG-MS025	**Ref. code**	

TRADE TERMS

Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	1 piece
Unit price	**US$:**		

DESCRIPTION

Design concept To meet the need of top-grade entertainment and bar for the continuous innovation, pursuit extraordinary shock result, we have combined foreign and China advanced technology for build the first product, and bringing this brand-new visual experience to you. We have learned from the current domestic and foreign products comprehensive advantages for this product design. It has good advanced, practical, high stability, good compatibility and expansibility and other characteristics. Our company for the	position, modeling, and single, several pieces can be arbitrary joining together. It's can show digital, letter, to run the light, dimmer, video conversion and other programs, and it also can edit effect according to your own ideas. We can control every alone bulb to shaping the different effect. We often use the change color light to flash out on it to make multicolored effect, bring the new stage effect shock to you. It's your best choice to pursuit extraordinary and leading the trend of the stage, five to ten years to keep the leading of stage lighting industry and

product development and design is very seriously, after careful thinking elaborate of design, produce this rigorous scientific perfect product. The related materials of this light are all choose the stable and reliable international famous brand equipment. It makes sure the whole of product performance index and ensures that the product of the stability and security, and the product with high science and technology leading and expansibility, reached the top class standard in China. **Features** This product belongs to new ideas, initiative in China, suitable for high grade, high bar and other performing arts stage places. According to your will of the arbitrary put the	never eliminated. **Specifications** Input voltage: AC230V, 50Hz Power consumption: 1900W Fuse: 15A Lamp: PAR 30,75W Lamp life: about 2000 hours Lamp qty: 25pcs par30 Control mode: DMX Mode; Master/slave mode Channel QTY: 3,8,25,28 optional Communication protocol: standard DMX512 protocol Carton package size: 650*265*650mm(1pc/carton) N.W/G.W: 21kg/23kg

PACKAGE

Package	carton	**Pcs/ctn**	1pc/ctn
Ctn size	650*265*650mm	**N.W/G.W**	21kg/23kg

BACK TOP

SEARCH LIGHT SERIES

1000W Sky Beam Search Light






Origin	Guangzhou, P. R. China	**Trademark**	**VANGAA**
Mode No.	VG-SB1000	**Ref. code**	

TRADE TERMS

Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	1piece
Unit price	US$:		

DESCRIPTION

Specifications Input voltage: AC110V/220V, 50/60Hz Working current: 29~30A Lamp spec.: XQ1000W Lamp lifetime: 1000hours(light declines after 600hours) Color temperature:5600K Light beam angle: 0.6~0.8° Horizontal:110°	Vertical:60° View distance:1~2km IP rating: IP54 Shell of the machine: aluminum alloy, plate shell with insulated lacquer Colors: red, yellow, blue, green, white are optional Size: 570*470*860mm

PACKAGE

Package	Wooden case	**Pcs/ctn**	1Pcs/case

Case size	630*530*920mm	**N.W/G.W**	72kg/90kg

Moving Head Sky Beam Light






Origin	Guangzhou, P. R. China	**Trademark**	**VANGAA**
Mode No.	VG-SB5002	**Ref. code**	
TRADE TERMS			
Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	1piece
Unit price	2KW US$: 3KW US$: 4KW US$: 5KW US$:		

DESCRIPTION

Specifications Input voltage: AC110V/220V, 50/60Hz Power consumption: 2000W/3000W/4000W/5000W Lamp: XQ2000W/ XQ 3000W/ XQ 4000W/ XQ 5000W Lifetime of the lamp:1000hours Strobe: 1~5times/second PAN:350 °, TILT:270 ° Control mode: Master/slave; work Auto; DMX-512 DMX Channels:7CH	Ch01: PAN scan (0 °-350 °); Ch02: PAN scan adjustment fine16BIT; Ch03: TILT scan (0 °-270 °); Ch04:TILT scan adjustment fine 16BIT; Ch05: PAN& TILT scan speed; Ch06:Switch lamp/light restoration; Ch07: Dimmer/Strobe. IP rating: IP54 Finished size: 580*750*1250mm

PACKAGE

Package	Wooden case	**Pcs/ctn**	1Pcs/case
Case size	586*756*1370mm	**N.W/G.W**	kg/kg

One Head Stainless Steel Sky Beam Light






Origin	Guangzhou, P. R. China	**Trademark**	**VANGAA**
Mode No.	VG-SB5003	**Ref. code**	
TRADE TERMS			
Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000

Price term	Ex-work	**MQO**	1piece
Unit price	2KW US$: 3KW US$: 4KW US$: 5KW US$:		

DESCRIPTION

Specifications

Input voltage: AC220V/380V, 50/60Hz
Input current:16~18A
Current of lamp: ＞65A
Voltage of lamp: 28~31V
Rated power: 3300W(Xenon lamp, 3000W)
Lamp: Xenon lamp 3000W(2000W/4000W/5000W optional)
Lamp life expectancy:1000hours(light declines after 600hours)
Intensity of electricity resistance:1.5KV
Insulation resistance: ＞2MΩ
Control mode: stand-alone mode
Color effect: white, red, blue, green, yellow are optional
Adjustment angle: horizontal 360°, clockwise and wither continue rotating, vertical 45°
Dimmer: orientation function
Light beam angle: 0.6~0.8°
IP rating: IP54
Range:5~7km
Size: 840*520*1050mm

PACKAGE

Package	Wooden case	**Pcs/ctn**	1Pcs/case
Case size	mm	**N.W/G.W**	kg/kg

Sky Beam Search Light






Origin	Guangzhou, P. R. China	**Trademark**	**VANGAA**
Mode No.	VG-SB5004	**Ref. code**	

TRADE TERMS

Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	1piece
Unit price	2KW US$: 3KW US$: 4KW US$: 5KW US$:		

DESCRIPTION

This light is widely used of the high building, skyscrapers, grand hotels, sports buildings, public parks, fairgrounds, plazas, TV stations, holiday village, scenic spots and other outdoor performances. With high brightness light beam, it lets the outdoor using increase wonderful color.

Features

Special reflector, maximum brightness efficiency;
Horizontal:110°, Vertical:60°;
Beam distance can reach to 3~6km;
Wooden case or flight case package are optional.

Specifications


Input voltage: AC110V/220V/380V, 50/60Hz
Working current: 29A~30A
Lamp spec.: XQ2000W/3000W/4000W/5000W
Lamp lifetime: 1000hours(light declines after 600hours)
Color temperature: 5600K
Light beam angle: 0.6~0.8°
Horizontal:110°

Different color can be chose, red, yellow, blue, green, purple, white; Shell of the machine: aluminum alloy, plate shell with insulated lacquer; Long lifespan, high quality, brightness light beam;	Vertical:60° View distance:3~6km IP rating: IP54 Colors: red, yellow, blue, green, purple, white are optional Size: 630*700*1120mm

PACKAGE

Package	Wooden case	**Pcs/ctn**	1Pcs/case
Case size	690*760*1180mm	**N.W/G.W**	72kg/90kg

Sky Rose Light

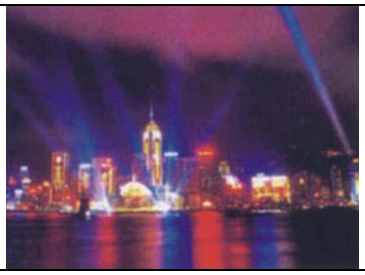

Origin	Guangzhou, P. R. China	**Trademark**	**VANGAA**
Mode No.	VG-SR5005	**Ref. code**	

TRADE TERMS

Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	1piece
Unit price	2KW US$: 3KW US$: 4KW US$: 5KW US$:		

DESCRIPTION

Specifications Input voltage: AC110V/220V/380V, 50/60Hz Lamp spec.: XQ2000W/3000W/4000W/5000W Lifetime of lamp: 1000hours Color temperature: 5600K Insulation resistance: ＞2MΩ	Beam spec.: 0.6~0.8° PAN: 90° TILT: 60° IP rating: IP54 Control mode: work auto View distance:300~500m Size: 630*700*1120mm

PACKAGE

Package	Wooden case	**Pcs/ctn**	1Pcs/case
Case size	690*760*1180mm	**N.W/G.W**	72kg/90kg

Moving Head Discolor Search Light






Origin	Guangzhou, P. R. China	**Trademark**	**VANGAA**
Mode No.	VG-SS5001	**Ref. code**	
TRADE TERMS			
Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	1piece
Unit price	2KW US$: 3KW US$: 4KW US$: 5KW US$:		

DESCRIPTION

This light is widely used for the high building, skyscrapers, grand hotels, sports buildings, public parks, fairgrounds, plazas, TV stations, holiday village, scenic spots and other outdoor performances. With high brightness light beam, it lets the outdoor using increase wonderful color.

Features

Special reflector, maximum brightness efficiency;
PAN: 350 °, with light sensitive rectify function and restoration AUTO;
PAN FINE adjustment: 4.5 °fine adjustment, position accurately;
TILT: 270 °, with light sensitive rectify function and reposition AUTO;
TILT FINE adjustment: 4.5 °fine adjustment, position accurately;
White color + CMY color changing system=multi colors;
Beam distance can reach to 2~7 km;
Light output: 4km;
Programming working(single), master/slave in phase working (work-group) control signal reposition, pan/tilt reverse;
Luminous beam: 250 mm via Heat control, Pressure Control, Over-load control short circuit control.

Specifications

Input voltage: AC110V/220V/380V, 50/60 Hz
Power consumption: 2500W/3500W/4200W/5600W
Lamp: XQ2000W/3000W/4000W/5000W
Lifespan of the lamp: 1000hours
Input current: 12-15A
Signal: DMX-512
Control mode: DMX-512, Master/slave, Auto-run alone
DMX channels: 12CH
Color: CMY + white
IP rating: IP55

PACKAGE

Package	Wooden case	**Pcs/case**	1Pcs/case
Case size	680*790*1430mm	**N.W/G.W**	105kg/125kg
Package	Flight case	**Pcs/case**	1Pcs/case
Case size	770*860*1490mm	**N.W/G.W**	105kg/175kg

Sky Search Light






Origin	Guangzhou, P. R. China	**Trademark**	**VANGAA**
Mode No.	VG-SS7001	**Ref. code**	
TRADE TERMS			
Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	1piece

Unit price	6KW US$: 7KW US$:		
DESCRIPTION			
Specifications Input voltage: AC110V/220V, 50/60Hz Working current: 29A, 30A Lamp spec.: XQ6000W/7000W Lamp lifetime: 1000hours(light declines after 600 hours) Color temperature:5600K Light beam angle:9°（10~15km)		View distance: 6~8km Horizontal:110° Vertical:45° IP rating: IP54 Shell of the machine: aluminum alloy, plate shell with insulated lacquer Colors: red, yellow, blue, green, white are optional	
PACKAGE			
Package	Wooden case	**Pcs/case**	1Pcs/case
Case size	700*800*1300mm	**N.W/G.W**	90kg/105kg

Color Mixing Moving Head Sky Beam Light








Origin	Guangzhou, P. R. China	**Trademark**	**VANGAA**
Mode No.	VG-SB2001	**Ref. code**	
TRADE TERMS			
Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	1piece
Unit price	2KW US$:		
DESCRIPTION			
Features Special reflector, Maximum brightness efficiency; PAN:540 °With light sensitive rectify function and restoration AUTO; PAN Fine adjustment:4.5 °fine adjustment, position accurately; TILT:270 °With light sensitive rectify function and reposition AUTO; TILT Fine adjustment:4.5 °fine adjustment, position accurately; White color + CMY color changing system=multi colors; Beam distance can reach to 2KW,the diameter of the beam is 230mm; DMX Channels details: Ch01: Dimmer/strobe; Ch02:Off lamp; Ch03:Prism; Ch04: Cyan;		lamp/speed of Prism; Ch08: CMY color fixing+ color wheel work Auto; Ch09: Focus; Ch10: Pan/Tilt pros and cons; Ch11: Pan; Ch12: Tilt; Ch13: Pan fine adjustment; Ch14: Tilt fine adjustment; Ch15: Speed of Pan/Tilt; Ch16 :Restoration **Specifications** Input voltage: AC110V/220V/380V, 50/60Hz Power consumption: 2500W Lamp: XQ2000W Lifetime of the lamp: 1000hours LED Control panel Control Mode: Work Auto; Master/Slave; DMX-512 control signal DMX channels: 16CH IP rating: IP44	

Ch05: Magenta; Ch06:Yellow; Ch07: CMY /Off		Body size: 500*420*730 mm	
PACKAGE			
Package	Wooden case	**Pcs/case**	1Pcs/case
Case size	570*470*840mm	**N.W/G.W**	kg/kg

Three Head Sky Search Light


Origin	Guangzhou, P. R. China	**Trademark**	**VANGAA**
Mode No.	VG-3H5006	**Ref. code**	
TRADE TERMS			
Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	1piece
Unit price	1KWx3 US$: 2KWx3 US$: 3KWx3 US$: 4KWx3 US$: 5KWx3 US$:		

DESCRIPTION

Specifications

Input voltage: AC110V/220V/380V, 50/60Hz
Input current: 56~72A
Current of lamp: ＞72A(three lamps, 2000W each)
Voltage of lamp: 27~39V
Rated power: 6800W(Xenon lamp, 2000W& 3 heads)
Lamp spec.: xenon lamp
1000W/2000W/3000W/4000W/5000W
Lifetime of lamp: 1000hours(light declines after 600hours)
Intensity of electricity resistance:1.5KW
Insulation resistance: ＞2MΩ
Control mode: stand-alone mode ·
Color effect: white, red, blue, green, yellow are optional
Adjustment angle: horizontal 110° continuous rotating
TILT: 45°
Dimmer: orientation function
Light beam angle: 0.6~0.8°
IP rating: IP54
Range: 5~7km

PACKAGE			
Package	Wooden case	**Pcs/case**	1Pcs/case
Case size	1260*1260*1470mm	**N.W/G.W**	325kg/560kg

Four Head Sky Beams Search Light





Origin	Guangzhou, P. R. China	**Trademark**	**VANGAA**

Mode No.	VG-4H5007	**Ref. code**	
TRADE TERMS			
Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	1piece
Unit price	1KWx4 US$: 2KWx4 US$: 3KWx4 US$: 4KWx4 US$: 5KWx4 US$:		
DESCRIPTION			

Specifications

Input voltage: AC220V/380V, 50/60Hz
Input current: 56~72A
Current of lamp: ＞72A(four lamps, 2000W each)
Voltage of lamp: 27~39V
Rated power: 8800W(Xenon lamp, 2000W& 4 heads)
Lamp spec.: xenon lamp
1000W/2000W/3000W/4000W/5000W
Lifetime of lamp: 1000hours(light declines after 600hours)
Intensity of electricity resistance:1.5KW
Insulation resistance: ＞2MΩ
Control mode: stand-alone mode ·
Color effect: white, red, blue, green, yellow are optional
Adjustment angle: horizontal 110° continuous rotating
TILT: 45°
Dimmer: orientation function
Light beam angle: 0.6~0.8°
IP rating: IP54
Range: 5~7km

PACKAGE			
Package	Wooden case	**Pcs/case**	1Pc/case
Case size	1260*1260*1470mm	**N.W/G.W**	325kg/560kg

BACK TOP

STROBE LIGHT SERIES

3000W Atomic Strobe Light





Origin	Guangzhou, P. R. China	**Trademark**	**VANGAA**
Mode No.	VG-ST3000	**Ref. code**	
TRADE TERMS			
Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	1piece
Unit price	US$:		
DESCRIPTION			

Features

This VG-ST3000 DMX Strobe is dimmable from 0~100%. Flash duration is controllable and for ultimate flexibility and variety of effect, variable adjustment of flash rate (20ms to 2 seconds) and flash intensity is possible;
The DMX Strobe is both intense and intelligent. DMX
Quiet temperature-controlled fan cooling Smart integrated heat control eliminates cool down time;
Atomic Detonator remote control, socket kit for lamp change auto-ranging.

Specifications

Input power: AC110~220V, 50/60Hz

controllable, it employs a smart, integrated heat control that eliminates the need for cool down time; Wrap your strobe effects in a wealth of color with the -defining the effect to the moment; 3000W long-life Xenon lamp included 5600 K color temperature; Continuous blinder effect with auto fade;	Power consumption: 3000 W Light sources: 3000W XOP 15 xenon lamp, Philips brand Working voltage: no less favorable than 200W Working current: 0~30A(max instantaneous current) Control mode: DMX-512; stand-alone; master/slave; Detonator remote control Preprogrammed special effects DMX channels: 7CH

PACKAGE

Package	carton	**Pcs/ctn**	2Pcs/ctn
Ctn size	245*425*240mm	**N.W/G.W**	6.5kg/7.5kg

3000W Strobe Light Detonator Remote






Origin	Guangzhou, P. R. China	**Trademark**	**VANGAA**
Mode No.	VG-ST3000R	**Ref. code**	

TRADE TERMS

Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	1piece
Unit price	US$:		

DESCRIPTION

The Detonator is an optional, dedicated remote control tool for easy command of the VG-ST3000 DMX strobe's flash rate and intensity. **Features** It includes blinder effect and single flash detonator buttons as well as a chase/synchronization toggle switch. Easy to set up and operate, the VanGaa Detonator requires no	external power source; Dedicated remote control for Atomic strobe series; Fader-controlled flash rate and intensity Single button for Detonator blinder effect Separate button for single flash and flash sync; Chase effect operation with multiple units No external power necessary Easy set-up and operation.

PACKAGE

Package	carton	**Pcs/ctn**	1Pc/ctn
Ctn size	245*425*240mm	**N.W/G.W**	1.5kg/2kg

1500W DMX Strobe Light



Origin	Guangzhou, P. R. China	**Trademark**	**VANGAA**
Mode No.	VG-ST1500A	**Ref. code**	
TRADE TERMS			
Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	1piece
Unit price	US$:		
DESCRIPTION			

Features

Die-cast aluminum showing its beautiful style with a mellow and streamlined shape;

Standard USITT DMX-512 signal communication system, 2 channels functional control;

Built-in over heat protection and high voltage protection. Electric Triggers;

Enclose the high light and the 500H strobe lamp;

Strobe-effect with adjustable speed (1-12 flashes/sec).

Specifications

Input voltages: AC110V/220V, 50/60Hz

Power Consumption: 1800W

Lamp: 1500W strobe lamp

Flash Rate: 1-12 fps

Input: Analog

Connectors: 1/4" (6.35mm) mono microphone jack

Data in/out locking: 3-pin&5pinxlr

Remote trigger signal: DMX512&15DC trigger

DMX512 Control channels: 2CH (1CH brightness: 1~100%; 2CH flashes speed1-12/ fps)

PACKAGE			
Package	carton	**Pcs/ctn**	1Pcs/ctn
Ctn size	mm	**N.W/G.W**	kg/kg

1500W Strobe Light



Origin	Guangzhou, P. R. China	**Trademark**	**VANGAA**
Mode No.	VG-ST1500B	**Ref. code**	
TRADE TERMS			
Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	1piece
Unit price	US$:		
DESCRIPTION			

Specifications Input power: AC110~220V, 50/60Hz Power consumption: 1500 W Lamp:1500W pulse tube, Philips		Flash speed:1-12flash each time, strobe power 1500W; strobe speed and bright degrees are adjustable, additional controller can be added, multi-online synchronization is available	
PACKAGE			
Package	carton	**Pcs/ctn**	1Pcs/ctn
Ctn size	480*220*160mm	**N.W/G.W**	4.5kg/5kg

BACK TOP

DMX CONTROLLER SERIES

Sunlite Suite 1024 Channels Controller



Origin	Guangzhou, P. R. China	**Trademark**	**VanGaa**
Mode No.	VG-SUNLITE1024	**Ref. code**	
TRADE TERMS			
Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	1piece
Unit price	US$:		

DESCRIPTION

Sunlite Suite, the lighting control software that outperforms most consoles/desks available on the market!

Features

Decoded USB-DMX signal, support multiple USB-DMX decoding, stable output;

With standard 2 DMX512 output(1024 channels), the DC/DC power isolation and photoelectric isolation;

Support connect with PC working and off PC working two selection modes, single chip microcomputer decoding, and external random access memory;

Accept DMX512 light controller control. In order to realize the controller synchronous control the video software, through the interface into the 3D software control to realize the computer 3D effect and the scene synchronized;

Setting up the 3D stage on the computer, to realize the computer 3D stage effect synchronized with the live stage light effect;

Making audio and video synchronously to make up the Output AVI 3D lighting effect;

Support Windows XP/2000/98se/Vista operating system, recognition automatically, plug and play.

Specifications

The software has updated:

1. The channels of independent mode has added to 512CH;
2. Built-in programs can be recalled to edit when using independent mode editing programs;
3. The shapes of the objects are visible when callout the object in 3D stage editing time.

The minimum requirements of computer configuration:

1. Computer running windows XP system;
2. Processor frequency: 800Mhz;
3. 256Mbmemory (RAM);
4. Support Microsoft direct 3D video card if the computer with 32Mb memory;
5. 800x600 pixel screen.

The recommended computer configuration conditions:

1. Computer running Windows XP system;

music lighting effect show, realize using drag, move or extend the time scale of the audio and video to arrange the start and end time of lighting effect; Equipped with the memory storage to realize the off PC working, it's the "Alone with the machine" working mode, you need load the edited programs into the memory storage box; Create your own lighting effect data or edit the exited lighting data, all the lighting effects will be included(such as color, gobo, gobo rotating, prism and so on); Built-in visual effect and programs with icons, it's very easy to use by the computer mouse click;	2. Processor frequency: 2GHz; 3. 1G memory (RAM); 4. 128Mb memory which support Microsoft Direct 3D video card; 5. 1280x1024 pixel screen; 6. The external power supply requirements of the USB-DMX decoder when off PC: Voltage: DC9V~12V; Current: no less than 300mA; Polarity: +center; Suggest using complying with CE and UL standard power supply.

PACKAGE

Package	carton	**Pcs/ctn**	1pc/ctn
Ctn size	mm	**N.W/G.W**	kg/kg

2048CH DMX Controller



Origin	Guangzhou, P. R. China	**Trademark**	**VANGAA**
Mode No.	VG-DC2048A	**Ref. code**	

TRADE TERMS

Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	1piece
Unit price	US$:		

DESCRIPTION

Features With big screen LCD display, has Chinese/English menu operation mode; Has 2048 DMX control channels, DMX512/1990 standard, photoelectric isolating signal output; 240 sets computer lights or 240 lines dimmer can be controlled max at the same time; Every light max 42 DMX control channels, use the lamp library mode("PEARL" lamp libraries are compatible; Built-in SHAPE effect direct election key, hold out site fluctuates effects effectively; Built-in graphics generator, users can control the effect of the computer lights conveniently, such as circle, wave,	music synchronized or MIDI control optional; Use command-line operating mode make control more convenient; With VGA display port(display optional), can connect 1 piece VGA display, Intuitive interface, make control easier; With USB interfaces, support USB flash disk data backup and system upgrade, make control easier; Equip with professional gooseneck working lamp, suitable for indoor and outdoor performances use. **Specifications** Input power:AC100~240V, 50/60Hz, high-performance green switch power, accord with world power supply

aperture brightness changes etc effect, composition, transformation and unfold etc special effect; Program synchronous control: internal and external speed,		requirements; Power consumption: 25W	
PACKAGE			
Package	carton	**Pcs/ctn**	1Pcs/ctn
Ctn size	730*540*140mm	**N.W/G.W**	kg/kg

2048CH DMX Controller





Origin	Guangzhou, P. R. China	**Trademark**	**VANGAA**
Mode No.	VG-DC2048B	**Ref. code**	
TRADE TERMS			
Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	1piece
Unit price	US$:		
DESCRIPTION			
Features Each console individually has an electronic serial number, linked to physically engraved metalwork numbering making reselling of stolen consoles more difficult; Fixture Selects (selecting the top row of faders); 2048 Channels; 240 Intelligent Fixtures; 240 Dimmer Control Channels; Theatrical Plotting and Playback functions; Shape Generator for instant creation of patterns and effects; 15 Playback Masters controlling 450 memories, chases or		cue lists; MIDI and Bass, Mid, Treble sound to light triggers; Front panel now reverse printed Poly Carbonate Laminate using technology from the Diamond 4, this is incredibly hard wearing and looks excellent; View VDU screen on a connected PC; Load and Save shows over USB. **Specifications** DMX signal output connector: XLR-D3F×4 Option12V Gooseneck lamp with BNC Socket Input power: AC110~240V, 50/60Hz	
PACKAGE			
Package	Wooden case	**Pcs/case**	1Pcs/case
Case size	830*630*280mm	**N.W/G.W**	28kg/38kg

512CH DMX Controller







Origin	Guangzhou, P. R. China	**Trademark**	**VANGAA**
Mode No.	VG-DMX512U	**Ref. code**	
TRADE TERMS			
Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	1piece
Unit price	US$:		
DESCRIPTION			

Features

512 DMX channels with 2 optical isolated output;
32 units with 16 DMX channels each;
LCD display;
16 channel faders, 1 chase speed fader, 2 modulation Wheel for 16 bit of Tilt / Pan;
48 chases, total 1600 steps. Each step contains its speed and cross time, can be set respectively;
48 scenes;
15 environment programs to output the combination, which are composed of different scenes, chases and manual output quickly;
8 chases, 48 scenes can be run simultaneously. At most 32 unit can be Manual operate;
Backup or restore with USB Flash drive;
Music trigger function for Chase;
The Data auto-saves.

Specifications

Option: 12V Gooseneck lamp with BNC Socket
Power supply: AC100-240V, 50/60Hz

PACKAGE			
Package	carton	**Pcs/ctn**	1Pcs/ctn
Ctn size	483*400*105mm	**N.W/G.W**	8kg/10kg
Package	Wooden case	**Pcs/case**	1Pcs/case
Case size	500*430*120mm	**N.W/G.W**	8kg/15kg

New Model 192DMX Controller






Origin	Guangzhou, P. R. China	**Trademark**	**VANGAA**
Mode No.	VG-DC192	**Ref. code**	
TRADE TERMS			
Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	1piece
Unit price	US$:		
DESCRIPTION			

Features 192 DMX Channels of control; Controls up to 12, 16-channels fixtures; 4 digits LCD user interface; 30 banks of 8 scenes, 240 scenes in total; Beat-activation, tap sync, auto run; 6 sets of chases containing 240 scenes; MIDI compatible;	Grab any fixture on the fly; Polarity selector; 3-space 19" rack or desk top use; ·Fine plastic frame available per request. **Specifications** Input power: AC110~240V, 50/60Hz Power supply: AC 12V, 50~60 Hz

PACKAGE			
Package	carton	**Pcs/ctn**	1Pcs/ctn
Ctn size	585*192*125mm	**N.W/G.W**	2.4kg/2.6kg

Sunlite Suite 1024 Channels Controller



Origin	Guangzhou, P. R. China	**Trademark**	**VANGAA**
Mode No.	VG-SUNLITE1024	**Ref. code**	
TRADE TERMS			
Payment term	T/T, Western Union, Paypal	**H.S. Code**	9405409000
Price term	Ex-work	**MQO**	1piece
Unit price	US$:		

DESCRIPTION

Sunlite Suite, the lighting control software that outperforms most consoles/desks available on the market! **Features** Decoded USB-DMX signal, support multiple USB-DMX decoding, stable output; With standard 2 DMX512 output(1024 channels), the DC/DC power isolation and photoelectric isolation; Support connect with PC working and off PC working two selection modes, single chip microcomputer decoding, and external random access memory; Accept DMX512 light controller control. In order to realize the controller synchronous control the video software, through the interface into the 3D software control to realize the computer 3D effect and the scene synchronized; Setting up the 3D stage on the computer, to realize the computer 3D stage effect synchronized with the live stage	Output AVI 3D lighting effect; Support Windows XP/2000/98se/Vista operating system, recognition automatically, plug and play. **Specifications** The software has updated: 1. The channels of independent mode has added to 512CH; 2. Built-in programs can be recalled to edit when using independent mode editing programs; 3. The shapes of the objects are visible when callout the object in 3D stage editing time. The minimum requirements of computer configuration: 1. Computer running windows XP system; 2. Processor frequency: 800Mhz; 3. 256Mbmemory (RAM); 4. Support Microsoft direct 3D video card if the computer with 32Mb memory; 5. 800x600 pixel screen.

light effect; Making audio and video synchronously to make up the music lighting effect show, realize using drag, move or extend the time scale of the audio and video to arrange the start and end time of lighting effect; Equipped with the memory storage to realize the off PC working, it's the "Alone with the machine" working mode, you need load the edited programs into the memory storage box; Create your own lighting effect data or edit the exited lighting data, all the lighting effects will be included(such as color, gobo, gobo rotating, prism and so on); Built-in visual effect and programs with icons, it's very easy to use by the computer mouse click;	The recommended computer configuration conditions: 1. Computer running Windows XP system; 2. Processor frequency: 2GHz; 3. 1G memory (RAM); 4. 128Mb memory which support Microsoft Direct 3D video card; 5. 1280x1024 pixel screen; 6. The external power supply requirements of the USB-DMX decoder when off PC: Voltage: DC9V~12V; Current: no less than 300mA; Polarity: +center; Suggest using complying with CE and UL standard power supply.

PACKAGE

Package	carton	**Pcs/ctn**	1Pcs/ctn
Ctn size	mm	**N.W/G.W**	kg/kg

BACK TOP

REMARKS

1). The price are including the high quality carton or wooden case package, if you want to chose the Flight Case to pack, please contact with us, we will give you the cost of the flight case;

2). The above price are including EDISON LEDs, the brand name of the LED has noted; If you need other brand LEDs, please contact with us and we will give you quotation again;

3). These prices are valid for 30 days only. Different months will have different prices. Please pay attention our promotional event or special offer. Our price will change on the basis of the market;

4). For any policy change by Chinese government which will impact export cost, price will be adjusted accordingly without prior notice;

5). In case the currency of Chinese Yuan increases value, price will be increased accordingly without prior notice;

6). Term of payment: EXW BY T/T. 30% deposit will be needed before producing, and the rest should be paid before delivery;

7). Time of delivery: 7~10 days after confirmed the sale contract; We will discuss the delivery time for the big amount quantity order;

8).TERMS OF AFTER-SALES SERVICE:

1. The time of after-sale service is 1 years, Xenon lamp with 3 months after-sale service;

2. In the after-sale service time, because of the product's quality(not man-made sabotage), the products couldn't operate normally, the buyer can enjoy the right of after-sale service. The buyer has to provide the pictures and videos to show the matter of the products. The seller will send the parts and technical supports to change the matter parts. And the cost of freight for the parts will be paid by buyer. The parts and the cost of professional maintenance teams' labor cost will be paid by seller. If it still couldn't deal with the mater, please see term 3;

3. In the after-sale service time, if the remote technical assistance and parts still couldn't deal with the matter of the products, the buyer have the right to send back the products to the factory to re-new. We will send the re-new ones to the buyer in 7 days. The cost of freight from buyer to the factory will be full paid by buyer. The seller will pay one-quarter of the cost for the freight from factory to buyer. The last three quarter should be paid by buyer.

Hope it could meet your need. If you have any other requirement, please feel free to contact with us.

Justin Yin

VanGaa International Lighting Factory, **warmly welcome you to visit our factory or contact with us, hope you will do well in your great business. We will give you our BEST service, competitive price and high quality products to you.**

Homepage: http://www.vangaa.com www.vangaalight.com
Annt: Mr. Justin Yin
Position: International Sales Manager
E-mail: justinyin@ymail.com
justin@vangaalight.com
MSN: jantou2008@hotmail.com
Skype: jantou2008
Tel: 0086 8643 2439 ext 800
Fax: 0086 8643 2439 ext 812
Mobile phone: 0086 158 7651 6138